



Recommended Retail Price

The prices indicated in this document are our Recommended Retail Prices (RRP). There may be slight price variations in local markets.

These prices are based on a NZD/USD exchange rate of 1 NZD:0.61USD. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.reuters.com/markets/currencies>

BFM® STANDARD RANGE

**BLUEBAND™ Connectors • Caps
Covers • Spigots**

Contents

Spigots01

Lipped Spigot 01

Seeflex 040E 02

Seeflex 040AS03

Seeflex 020E04

Seeflex 060ES05

Add-Ons 06

TR (Tool Release)06

TR (Tool Release) Tools06

‘Smiley Face’ Hole Punch06

TR Lock-Out Safety System06

Quick Access Port 07

Rings07

Flexi 08

Flexi / Flexi-Light08

Flexi-Earthed09

Teflex10

Teflex Woven 10

Teflex NP Black11

Teflex NP Opaque 12

LM3 13

LM4 14

FM1 Breather15

Blanking Cap (Seeflex 040E) 16

Blanking Bin (Seeflex 040E)17

Kevlar Cover..... 18

Black-out Cover 19

Bulk Bag Loader 20

Other Products21

Weighing Bellows 21

Venting Surge Hopper 21

Tapers 21

Corner Connector (040E & 060ES) 21

Spigots

Welds to your pipes to allow snap-in fitting of BFM® connectors



- Available in 304L SS and 316L SS (Hastelloy available on request)
- The spigot design is slightly tapered, so the OD at the top of the tail is 5mm / 1/8" greater than the base
- BFM® spigots are 89mm (3½") in total length - made up of a head of 37mm (1 3/8") and a 'tail' that is 52mm (2") long

PHYSICAL PROPERTIES:

Material	304L SS or 316L SS
Wall Thickness	2.0mm/ 5/64"

Note:

- The 'tail' of the spigot can be cut to tailor the perfect fit for your available space (ensure caution is used when welding not to distort spigot head).
- Download the BFM® IG (Installation Gap) Calculator App to ensure correct between spigots before welding or contact your BFM® Distributor for help.



DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304 LSS	20000	126	21287	127	20001	131	20002	142	20003	163	20004	182	20005	206	20006	232	20007	251	20008	290	20009	345	20010	378	20011	393
316 LSS	20020	199	21288	204	20021	229	20022	252	20023	278	20024	317	20025	364	20026	411	20027	495	20028	517	20029	565	20030	580	20031	587

* Ø100mm measured externally (OD), all other Ø measured internally (ID).

DIA:	Ø700mm		Ø750mm		Ø800mm		Ø850mm		Ø900mm		Ø950mm		Ø1,000mm		Ø1,050mm		Ø1,100mm		Ø1,150mm		Ø1,200mm		Ø1,250mm		Ø1,300mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304 LSS	20012	816	20013	922	20014	1011	20015	1119	20016	1158	20017	1277	20018	1303	22222	1383	21203	1579	22815	1571	21161	1626	21434	1637	20019	1658
316 LSS	20032	897	20033	975	20034	1308	20035	1438	20036	1540	20037	1551	20038	1578	22794	1684	21853	1787	22795	1800	21934	1847	25426	1945	60022	2044

DIA:	Ø1,350mm		Ø1,400mm		Ø1,450mm		Ø1,500mm		Ø1,550mm		Ø1,600mm		Ø1,650mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304 LSS	21435	1678	21436	1698	22223	1793	21125	1895	22802	1974	21012	2290	21121	2303
316 LSS	25406	2151	25427	2242	25432	2366	22317	2499	25428	2607	25429	2716	22007	3039

Tool Release Holes:

Spigots can be supplied with standard round tool-release holes pre-drilled or smiley-face tool release holes pre-punched for an additional fee of US\$31 per hole. **PLEASE NOTE:** These pre-drilled/punched TR spigots have different part numbers to those shown here.

Lipped Spigot

Allows easy integration with quick-connect, clamped modular tubing/piping systems

To enable a BFM® fitting system to be integrated with 'quick connect' modular tubing/piping, a range of our 304SS spigots are available with a 6mm rolled 'lip'. The lip of the spigot clamps in place with the corresponding modular lip using quick-release clamp systems like Jacob.

DIA:	Ø100mm*		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304 LSS	20039	163	20041	167	20042	178	20043	199	20044	219	20045	242	20046	268



NOTE: a BFM® Lipped Spigot has a 6mm shorter overall height/length of 83mm.

The prices shown above indicate our Recommended Retail Prices (RRP) per spigot - to fit a standard BFM® connector as sealed, flexible connection, you will need two spigots (ie. one top, one bottom.)

Seeflex 040E

Strong, resilient, multi-purpose connector



- Used on all types of stationary, vibratory and gyratory sifters, screeners, feeders, bin discharges, hoppers, conveyors, any packing or product handling equipment.
- Superior wear resistance - used in CIP and washing.
- Available as a specially-marked “ Wash Sleeve “version (add US\$7 to price below).
- Available as Quick Access Port option

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity (Ohms)	10 ¹⁰

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION

OSCILLATION

COMPRESSION

DUST TIGHT

FOOD SAFETY

ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	21871	84	22554	94	21756	97	21395	112	21259	128	21969	148	21984	163	22564	200	22566	220	22166	249	22569	257	22573	312	22413	329
100	20050	88	22000	99	20061	102	20072	118	20083	135	20094	156	20105	173	20116	210	20127	232	20138	252	20149	270	20160	329	20171	346
150	20051	92	22001	101	20062	110	20073	123	20084	140	20095	162	20106	180	20117	225	20128	244	20139	253	20150	282	20161	340	20172	361
200	20052	95	22002	106	20063	117	20074	129	20085	148	20096	170	20107	190	20118	231	20129	256	20140	267	20151	297	20162	359	20173	380
250	20053	108	22168	127	20064	132	20075	157	20086	184	20097	207	20108	240	20119	282	20130	325	20141	341	20152	382	20163	448	20174	476
300	20054	117	22247	140	20065	142	20076	170	20087	199	20098	228	20109	260	20120	306	20131	350	20142	366	20153	411	20164	485	20175	515
350	20055	122	22555	150	20066	153	20077	173	20088	232	20099	234	20110	270	20121	336	20132	357	20143	392	20154	418	20165	510	20176	561
400	20056	124	22071	154	20067	153	20078	174	20089	235	20100	235	20111	277	20122	324	20133	375	20144	393	20155	439	20166	512	20177	562
450	20057	135	22556	170	20068	167	20079	200	20090	244	20101	270	20112	298	20123	361	20134	400	20145	436	20156	469	20167	559	20178	598
500	20058	142	22003	171	20069	175	20080	210	20091	273	20102	284	20113	302	20124	381	20135	422	20146	459	20157	493	20168	589	20179	629
550	20059	153	22557	176	20070	181	20081	228	20092	279	20103	296	20114	318	20125	418	20136	472	20147	505	20158	544	20169	647	20180	689
600	20060	157	21386	178	20071	182	20082	228	20093	290	20104	301	20115	328	20126	448	20137	501	20148	542	20159	586	20170	689	20181	725
650	22552	160	22558	183	21385	194	21208	248	21955	290	21742	323	22562	340	22500	451	22567	504	22170	545	22572	591	22577	692	22578	741
700	21278	162	22559	184	21231	204	21569	259	21353	303	22280	323	22563	357	21405	453	22249	506	21262	551	22571	594	22576	695	22579	744
750	22553	164	22560	195	21794	206	21560	261	21691	304	22338	327	23005	388	22252	464	22568	533	22506	556	22570	625	22575	725	22580	767
800	20570	165	21387	208	20571	207	20572	262	20573	306	20574	344	20575	389	20576	469	20577	543	20578	558	20579	645	20580	727	20581	769
850	24431	197	25562	218	21675	246	21839	290	22874	339	24964	390	24496	397	24771	496	26756	584	26657	606	40695	707	40696	760	40697	817
900	24593	206	28310	228	21943	257	21257	304	21786	351	21282	406	23088	418	21956	520	24320	608	22748	636	40726	737	22803	792	40728	851
950	22855	215	40724	238	22326	268	21607	317	22169	365	22099	421	24424	439	29732	544	21561	632	40725	664	40727	766	26267	823	26453	885
1000	20590	223	21468	247	20591	279	20592	331	20593	378	20594	436	20595	460	20596	567	20597	656	20598	693	20599	795	20600	855	20601	919

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Seeflex 040AS

Designed to dissipate static, ideal for potentially explosive areas




- Transparent, 'anti-static' connector, designed to dissipate static
- Excellent abrasion, chemical and puncture resistance

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy with an anti-static infusion
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 95°C / -13 to 203°F (surge to 100°C to 212°F)
Surface Resistivity (Ohms)	10 ⁸ (very good at dissipating static)

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

					
VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	70082	104	70098	119	70114	127	70130	143	70146	163	70162	188	70178	209	70194	257	70210	283	70226	328	70242	336	70258	423	70274	431
100	70083	110	70099	126	70115	133	70131	150	70147	171	70163	198	70179	220	70195	270	70211	302	70227	337	70243	354	70259	427	70275	453
150	70084	110	70100	136	70116	148	70132	157	70148	183	70164	212	70180	235	70196	295	70212	327	70228	341	70244	380	70260	457	70276	485
200	70085	118	70101	137	70117	156	70133	163	70149	193	70165	223	70181	248	70197	305	70213	344	70229	359	70245	400	70261	481	70277	510
250	70086	125	70102	148	70118	160	70134	188	70150	223	70166	260	70182	265	70198	344	70214	399	70230	418	70246	472	70262	550	70278	587
300	70087	132	70103	151	70119	168	70135	198	70151	234	70167	273	70183	309	70199	361	70215	420	70231	440	70247	496	70263	579	70279	618
350	70088	138	70104	159	70120	178	70136	203	70152	282	70168	290	70184	321	70200	388	70216	434	70232	477	70248	512	70264	618	70280	661
400	70089	140	70105	184	70121	181	70137	203	70153	287	70169	302	70185	334	70201	389	70217	456	70233	478	70249	538	70265	620	70281	663
450	70090	156	70106	200	70122	202	70138	239	70154	323	70170	329	70186	367	70202	430	70218	481	70234	527	70250	569	70266	676	70282	725
500	70091	164	70107	213	70123	210	70139	251	70155	340	70171	345	70187	379	70203	452	70219	507	70235	554	70251	600	70267	712	70283	763
550	70092	178	70108	217	70124	218	70140	296	70156	357	70172	369	70188	437	70204	505	70220	570	70236	625	70252	675	70268	797	70284	850
600	70093	192	70109	220	70125	220	70141	298	70157	359	70173	373	70189	476	70205	540	70221	615	70237	686	70253	734	70269	849	70285	881
650	70094	192	70110	224	70126	240	70142	303	70158	359	70174	404	70190	484	70206	562	70222	620	70238	690	70254	739	70270	858	70286	911
700	70095	196	70111	229	70127	256	70143	310	70159	367	70175	420	70191	489	70207	568	70223	634	70239	726	70255	754	70271	875	70287	939
750	70096	199	70112	236	70128	261	70144	312	70160	371	70176	434	70192	492	70208	573	70224	648	70240	748	70256	770	70272	885	70288	950
800	70097	199	70113	249	70129	259	70145	315	70161	372	70177	437	70193	494	70209	576	70225	667	70241	767	70257	794	70273	888	70290	952
850	71021	234	70944	280	70389	295	70352	370	70933	431	71161	501	71162	559	71164	633	71165	744	71167	825	71169	897	71171	999	71173	1072
900	70805	244	71149	289	70392	307	70488	386	70291	450	71086	523	70587	583	71183	661	71186	772	71189	856	71192	932	71195	1035	71198	1112
950	71177	253	71178	298	70505	318	70487	401	71179	469	71155	545	71180	608	71184	688	71187	800	71190	888	71193	966	71196	1072	71199	1152
1000	70795	262	70752	308	70533	330	70379	417	70303	487	70423	566	71182	632	71185	716	71188	828	71191	919	71194	1000	71197	1108	71200	1191

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Seeflex 020E

Lightweight & flexible, ideal for weighscale applications



- Transparent, light weight Seeflex media, specifically designed for load and weigh scale type equipment
- Also very good in applications with vertical movement as it is particularly flexible

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.35mm / 1/64 inch
Operating Temp Range	-25 to 80°C / -13 to 176°F (surge to 100°C to 212°F)
Surface Resistivity (Ohms)	10 ¹⁰

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	On request only
Available with Plastic Rings?	On request only
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION

OSCILLATION

COMPRESSION

DUST TIGHT

FOOD SAFETY

ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	22155	84	22598	94	22610	97	22615	112	22360	128	21680	148	22622	163	22244	200	22646	220	22156	249	22672	257	22243	312	22699	329
100	20789	88	23000	99	20790	102	20791	118	20792	135	20793	156	21360	173	21361	210	21362	232	21363	252	21364	270	21365	329	21366	346
150	20690	92	23001	101	21222	110	21432	123	21317	140	21787	162	22623	180	22548	225	22647	244	22659	253	22673	282	22686	340	22700	361
200	21849	95	23002	106	21438	117	20692	129	20693	148	20694	170	21207	190	20695	231	20696	256	20697	267	20698	297	20699	359	20703	380
250	22425	108	22599	127	21781	132	21997	157	21613	184	21398	207	22624	240	22635	282	22648	325	22660	341	22674	382	22687	448	22701	476
300	21922	117	22342	140	21195	142	21837	170	21194	199	21384	228	22349	260	22636	306	22649	350	22661	366	22675	411	22688	485	22702	515
350	22590	122	22600	150	21882	153	21838	173	21774	232	21408	234	22625	270	22637	336	22650	357	22662	392	22676	418	22689	510	22703	561
400	22491	124	22601	154	21415	153	21308	174	21307	235	21784	235	22626	277	21806	324	22651	375	22063	393	22677	439	22690	512	22704	562
450	22591	135	22602	170	22492	167	22616	200	22316	244	22620	270	22627	298	22638	361	22652	400	22663	436	22678	469	22691	559	22705	598
500	23004	142	22603	171	22216	175	21303	210	21726	273	21915	284	22628	302	22639	381	22653	422	22664	459	22679	493	22692	589	22706	629
550	22592	153	22604	176	22611	181	21321	228	22445	279	21827	296	22629	318	22640	418	21913	472	22665	505	22680	544	22693	647	22707	689
600	22593	157	22605	178	21941	182	22040	228	22499	290	22621	301	22630	328	22641	448	22654	501	22666	542	22681	586	22694	689	22708	725
650	22594	160	22606	183	21369	194	22336	248	22618	290	21591	323	22631	340	22642	451	22655	504	22667	545	22682	591	22695	692	22709	741
700	22595	162	22607	184	22612	204	22104	259	22619	303	21636	323	22632	357	22643	453	22656	506	22668	551	22683	594	22696	695	22710	744
750	22596	164	22608	195	22613	206	22617	261	22150	304	21624	327	22633	388	22644	464	22657	533	22669	556	22684	625	22697	725	22711	767
800	22597	165	22609	208	22614	207	21714	262	22142	306	21189	344	22634	389	22645	469	22658	543	22670	558	22685	645	22698	727	22712	769
850	29178	197	41568	218	29459	246	24342	290	22315	339	23059	390	24837	397	24839	496	41573	584	26658	606	41581	707	41585	760	41588	817
900	41566	206	41569	228	22077	257	23154	304	23167	351	23168	406	24838	418	24840	520	41574	608	41578	636	41582	737	41586	792	41589	851
950	41567	215	41570	238	24767	268	22034	317	21699	365	40701	421	41571	439	24841	544	41575	632	41579	664	41583	766	41587	823	41590	885
1000	27031	223	26569	247	40148	279	21448	331	21631	378	21592	436	41572	460	41577	567	41576	656	41580	693	41584	795	22058	855	41591	919

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Seeflex 060ES

Superior strength for over-pressure situations



- Pressure-resistant Seeflex 060ES is a semi-transparent connector with an internal polyester scrim
- The internally bonded scrim restricts the Seeflex sleeve from stretching
- For over-pressure situations for continuous pressure up to 1.7 bar

PHYSICAL PROPERTIES:

Material	Seeflex - Ether-based thermoplastic polyurethane alloy with internally bonded polyester scrim
Wall Thickness (±10%)	1.3mm / 1/16 inch
Operating Temp Range:	-25 - 120°C / -13 - 248°F (surge to 140°C / 284°F)

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Longer lengths only

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	30763	159	30764	174	30856	190	30869	214	30929	242	30779	276	30780	303	30912	340	30930	370	31109	381	31121	411	31136	471	31151	499
100	30782	159	30806	174	30776	190	30760	214	30748	242	30731	276	30739	303	30836	340	30767	370	30827	381	30837	411	30925	471	31029	499
150	30773	167	30753	183	30746	201	30761	227	30762	257	30769	294	30727	322	30730	362	30790	394	30891	408	30832	440	31137	501	30890	533
200	30788	176	30908	193	30726	212	30729	240	30740	273	30771	311	30766	342	30770	384	30768	418	30732	434	30797	469	30794	533	30755	565
250	30887	184	31045	203	30777	223	30778	253	30818	289	30723	329	30867	362	30781	407	30951	443	30972	461	31122	497	30858	564	31152	598
300	30789	193	30988	213	30803	234	30831	266	30785	304	30819	346	30826	382	30888	428	31096	467	30855	487	30962	526	31138	594	31153	631
350	30933	202	31046	223	31057	245	30843	279	30821	320	30889	364	30913	402	30986	450	31097	491	30859	514	31123	554	30866	625	31154	664
400	30934	210	31047	232	31058	256	30845	292	31065	335	30744	381	30765	422	31086	473	31098	515	31110	540	31124	583	31139	656	31155	697
450	30935	219	30970	243	30917	267	30943	306	30820	350	31073	398	30846	442	30939	495	31099	540	30896	567	31125	612	31140	687	31156	731
500	31038	228	31048	253	31012	278	30942	318	30754	366	30931	417	31079	462	31087	517	31100	564	31111	594	31126	641	31141	718	31157	764
550	30857	236	31049	263	30906	289	31060	332	30863	381	30798	434	30904	482	30745	539	31101	589	31112	620	31127	669	31142	748	31158	797
600	30851	245	30910	272	30997	300	30811	345	30828	397	30796	451	30886	502	31088	561	30737	613	31113	646	31128	697	31143	780	31159	830
650	31039	254	31050	282	30918	310	30909	357	31066	412	31074	469	30847	522	31089	583	31102	637	31114	673	31129	727	31144	811	31160	863
700	31040	263	31051	292	30919	321	31061	371	31067	427	31075	486	31080	542	31090	605	31103	662	31115	700	31130	755	31145	842	31161	896
750	31041	271	31052	303	31059	332	31062	384	31068	443	31076	503	31081	562	31091	627	31104	686	31116	727	31131	783	31146	872	31162	930
800	31042	280	31053	312	30860	343	30873	397	31069	458	30932	522	31082	581	31092	649	31105	710	31117	753	31132	812	31147	904	31163	963
850	30861	289	31054	322	30959	354	31063	410	31070	474	31077	539	31083	601	31093	670	31106	734	31118	780	31133	841	31148	935	31164	996
900	31043	297	31055	332	30981	365	30998	423	31071	489	30905	556	31084	622	31094	693	31107	759	31119	806	31134	869	31149	965	31165	1028
950	31044	306	31056	342	30944	376	31064	436	31072	504	31078	574	31085	642	31095	715	31108	783	31120	832	31135	898	31150	997	31166	1062
1000	31030	315	31032	351	30772	387	30795	450	30877	520	30949	591	31033	662	31034	737	31035	808	31036	859	31037	927	31028	1027	31027	1094

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

TR (Tool Release)

As an added safety option, all BFM® fitting connectors are available in a TR (Tool Release) version which have a firmer snap-band that is virtually impossible to remove by hand. To calculate the price of a TR version of a connector, **simply add the following to the RRP of the standard connector price (based on the Diameter):**


Maximum possible diameter for TR is Ø650mm

DIA:	Ø100mm	Ø125mm	Ø150mm	Ø200mm	Ø250mm	Ø300mm	Ø350mm	Ø400mm	Ø450mm	Ø500mm	Ø550mm	Ø600mm	Ø650mm
	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:
Surcharge on standard Connector	15	15	17	20	21	24	27	31	59	60	64	67	71

TR (Tool Release) Tools

To remove the TR Connectors, a special BFM® 'TR Tool' is required. Our standard TR Tool option features a rounded end tool and only requires the spigot to have a 6mm hole drilled in the outer most ridge. The 'Smiley Face' tool has an additional level of safety as it is used with a specially shaped hole (see adjacent information).

	Part No:	RRP US\$:
Standard TR Tool	304990	51
Smiley Face TR Tool	304991	51



'Smiley Face' Hole Punch

For additional security, and to avoid staff improvising tools to remove connectors, our 'Smiley Face' Tool Release option is a popular choice. There is a special pneumatic 'punch tool' (shown right) that makes the custom-shaped holes. Spigots can be supplied with the holes pre-punched for a small additional charge. Contact your local distributor for more information.

	Part No:	RRP US\$:
Smiley Face Hole Punch	10402	P.O.A.



TR Lock-Out Safety System

Our Tool Release (TR) connector range is a popular way to add a layer of safety to applications where the connector is mounted very close to equipment that is rotating or spinning very fast, such as above rotary valves or rotary knives.

	Part No:	RRP US\$:
TR Lock-Out Safety System	305275	15



The prices shown above indicate our Recommended Retail Prices (RRP).

Quick Access Port

The Quick Access Port is a removable screw in plug that can be added to the wall of Seeflex 040E and Seeflex 060ES connectors to aid in-line testing/sampling (includes tapered versions).

For minimum 150mm diameter and 150mm length connectors.

	RRP US\$:
Surcharge on standard Connector RRP price	254



Rings


Applicable to: Seeflex 040E (including Wash Sleeves and Blanking Socks/Bins). Seeflex 040AS, LM3, LM4, Teflex and Teflex NP.

Anti-collapse rings can be added to help keep the connector walls open. This is particularly useful if operating under vacuum or for longer connectors where there may be the potential for the connector walls to be 'sucked' inwards. Rings are available in stainless steel (to Ø500mm) or plastic (to Ø1,650mm & max operating temperature of 110°C/230°F) and can be added to connectors at least 150mm (5") long if made from the materials listed above (subject maximum applicable diameters).

To calculate the price of a ringed version of a connector, simply add the following price per ring to the RRP of the standard connector price (based on the Diameter):

DIA(mm):	Ø100	Ø125	Ø150	Ø200	Ø250	Ø300	Ø350	Ø400	Ø450	Ø500	Ø550	Ø600	Ø650	Ø700	Ø750	Ø800	Ø850	Ø900	Ø950	Ø1000
	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:
Stainless Steel Rings	53	56	63	74	77	81	92	99	106	113	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Plastic Rings	71	77	85	92	99	106	113	117	120	120	120	120	127	169	183	197	218	232	246	268

- The distance between spigot & rings is 75mm (3") for 150mm long connectors, and 100mm (4") for all others.
- Multiple rings need to be evenly spaced at a minimum of 100mm (4") apart for connectors up to 800mm long inclusive (maximum 4 rings) and 200mm (8") apart for connectors 850mm long and over (maximum 10 rings). Maximum length restrictions apply to certain materials. Refer to our 'Quick Ref Limitations Summary' document for more information.
- The diameter of the steel ring itself is 6mm (¼"), the plastic ring itself is 8mm (⅝") and the 'connector' that joins the plastic ring together is approx. 10mm (⅜").

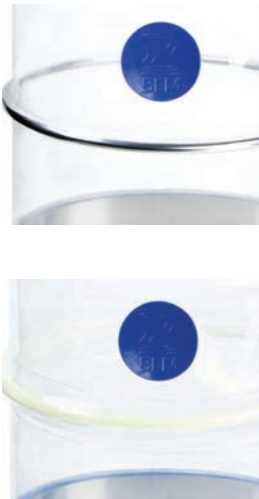

The prices shown above indicate our Recommended Retail Prices (RRP).

Flexi / Flexi-Light

Lightweight connector with support coil - ideal for bag feeders & filling heads



- A lightweight Seeflex connector with an encased 316 stainless steel wire coil to support flex and compression
- Used for bag feeders, filling heads or bulk bag fillers.
- Flexi-Light features a slightly lighter material and wire coil

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane with a 316 stainless steel wire coil	
Wall Thickness (±10%):	FLEXi	0.60mm / 1/32" (Ø100 – 200mm / 4 – 8")
		0.70mm / 1/32" (Ø250 – 300mm/10 – 12")
Wire Coil Diameter	FLEXi	0.4mm / 1/64"
	FLEXi-LIGHT	0.4mm / 1/64"
Operating Temp Range:	FLEXi	2.6mm / 3/64"
	FLEXi-LIGHT	1.6mm / 1/16"

Available Diameters:	100mm, 150mm, 200mm, 250mm, 300mm
Minimum Length:	200mm
Maximum Length:	6,000mm
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Subject to length & movement restrictions.

FLEXI:

DIA:	Ø100mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
200	25701	490	26152	506	22116	544	25910	670	21197	702
250	26905	500	26139	523	22190	569	26000	700	22938	737
300	26009	511	25871	534	21623	587	26825	724	21732	770
350	26233	520	25898	550	22136	610	26419	753	23104	800
400	25877	528	25615	563	23100	632	25789	781	21765	834
450	26156	539	25798	583	23101	653	25836	810	23099	867
500	26027	550	25899	591	23102	675	26415	836	60023	902
550	28884	562	25950	605	23103	696	25790	855	40277	937
600	25761	572	26640	620	23087	718	25791	874	22757	972
650	29278	582	28090	636	23111	742	28503	906	25207	1005
700	26246	592	26252	651	24293	760	26430	937	25507	1037
750	28883	601	26033	665	24645	783	26371	970	23105	1070
800	25592	612	26358	679	22392	805	25720	1001	22793	1106
850	29028	624	25593	692	24660	829	26904	1026	22804	1141
900	26525	629	25999	709	24818	850	25650	1049	22137	1175
950	26067	639	29970	727	26681	871	25668	1076	25671	1208
1000	25927	649	25928	744	24334	892	26581	1112	26866	1242

FLEXI - LIGHT:

DIA:	Ø100mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
200	28372	468	28279	487	28278	503	28869	607	29260	636
250	29479	477	28201	501	28200	523	29241	632	29736	666
300	40300	489	28262	515	28264	542	28261	656	28742	695
350	40301	501	29077	529	29194	562	29067	681	28744	726
400	29565	514	28934	544	28199	582	28877	706	28743	755
450	40302	526	28280	558	29259	601	28768	731	28500	786
500	28914	537	29157	572	29274	622	29193	755	29504	816
550	40303	545	40312	586	29569	641	40321	780	28918	845
600	28856	553	40313	600	29566	661	28494	805	29322	875
650	40304	562	40314	614	29328	681	40322	830	40258	906
700	40305	570	28281	628	40319	700	28941	854	40257	935
750	40306	578	40315	642	29060	720	40323	879	40267	965
800	40307	587	28552	656	29641	740	40324	903	40329	995
850	40308	596	40316	670	40320	759	40325	928	29607	1025
900	40309	604	29547	684	40150	780	28481	952	40330	1055
950	40310	612	40317	699	29966	800	40326	977	40331	1085
1000	40311	620	40318	713	29593	819	40327	1002	40332	1114

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector, please refer to the 'Add-ons' pages.

Flexi-Earthed

Flexi-connector with support coil & earthing terminal lugs



- A standard Flexi connector with built-in terminal earthing lugs attached to the ends of the wire coil.
- Terminal lugs are designed to be attached to earthing cables to provide maximum electrostatic safety.

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane with a 316 stainless steel wire coil & Ø5mm SS earthing lugs
Wall Thickness (±10%):	0.60mm / 1/32" (Ø100 – 200mm / 4 – 8") 0.70mm / 1/32" (Ø250 – 300mm/10 – 12")
Wire Coil Diameter	2.6mm / 1/64"
Operating Temp Range:	- 20 to 85°C / - 4 to 185°F

Available Diameters: 100mm, 150mm, 200mm, 250mm, 300mm
Minimum Length: 250mm
Maximum Length: 6,000mm
Available as TR (Tool Release) option? Yes

✓ VIBRATION	✓* OSCILLATION	✓ COMPRESSION	✓ DUST TIGHT	✓ 65+ 20+ FOOD SAFETY	✓ FDA 100% FOOD SAFETY	✓ ATEX
----------------	-------------------	------------------	-----------------	--------------------------------	---------------------------------	-----------


* Subject to length and movement restrictions

FLEXI - EARTHED:

DIA:	Ø100mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
250	29256	549	28795	572	28360	618	28845	748	28432	786
300	28825	561	28826	584	28314	636	28412	773	28872	819
350	40363	569	40265	599	28741	659	28448	803	28875	849
400	29083	578	28472	612	28864	681	29017	830	28519	883
450	40766	589	29023	632	28345	702	28701	859	28471	917
500	29497	599	28849	641	28529	724	28491	885	28660	951
550	40298	611	29917	655	29665	745	29942	904	28963	986
600	40360	620	29551	670	28833	767	28359	923	29321	1021
650	29627	631	40770	684	29196	791	40774	955	40778	1054
700	40767	642	29197	700	28848	809	28897	986	40779	1086
750	40299	650	40771	714	28766	832	40755	1019	40780	1119
800	29967	662	29292	728	28185	854	29057	1050	40781	1155
850	40768	673	40772	742	28501	878	40775	1075	40782	1190
900	29074	678	29075	759	28957	899	40776	1098	29390	1224
950	40769	689	29577	776	40400	920	40777	1125	40783	1258
1000	29289	698	40773	793	28765	941	28730	1161	28775	1291



Flexi-Earthed Terminal Lugs:

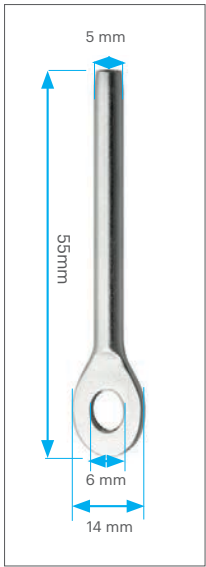

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector, please refer to the 'Add-ons' pages.

Teflex Woven

100% woven Polyester - suitable for higher temperatures



- Capable of running at high temperatures – continuously operating at 260°C / 500°F with short term surges at 280°C / 536°F.
- Can be used on products across the full pH scale, i.e. either caustic or acid products will not effect Teflex Woven.

PHYSICAL PROPERTIES:

Material	Woven PTFE	
Weight (±10%)	678g/m² / 20oz/yd²	
Operating Temp Range	-40 - 260°C / -40 - 500°F (surge to 280°C / 536°F)	
Air Permeability	(cm³/cm²/sec@125Pa)	(ft³/ft²/min@0.5" wg)
	0.3	0.5

Maximum Diameter: 1,650mm
Maximum Length (≤ Ø650mm): 1,500mm
Available with SS Rings? Yes (≤ Ø500mm)
Available with Plastic Rings?* Yes
Available as TR (Tool Release) option? Yes (≤ Ø650mm)

*to Max. Operating Temp of 110°C / 230° F

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	30465	284	40909	305	26659	406	30443	571	25395	648	30308	728	25284	754	30488	780	31280	850	26304	942	31281	1039	31282	1438	31283	1559
100	30079	284	30080	305	30081	406	21507	571	30065	648	21534	728	21470	754	30082	780	30083	850	30084	942	30085	1039	21535	1438	30086	1559
150	30001	315	30056	381	21537	448	21939	575	30063	676	21928	787	21505	833	21637	972	21926	1094	30311	1219	30312	1319	21927	1550	30310	1768
200	30096	338	30638	404	30061	469	21439	578	30057	683	20558	816	21506	894	20557	1041	20556	1094	30058	1219	30059	1319	21577	1550	30060	1768
250	30186	425	40235	487	21986	551	21341	691	21473	833	21475	979	21471	1103	21472	1253	21492	1396	21474	1546	24847	1696	26300	1823	27083	1972
300	30107	468	30804	539	30103	611	21343	766	30210	924	21339	1086	21957	1227	22898	1393	21166	1551	30101	1718	26051	1885	26052	2027	30160	2192
350	28881	511	40910	592	30209	670	21527	842	30211	1014	30212	1193	21528	1350	24748	1532	24991	1706	21686	1890	41082	2073	40393	2231	30155	2413
400	40895	554	40911	644	30176	730	22357	918	21558	1105	30280	1301	25171	1473	24749	1672	21627	1862	30223	2062	30224	2261	41103	2435	22011	2634
450	30325	598	40912	697	26204	790	22483	994	24711	1195	30259	1407	29047	1597	21337	1811	21600	2017	29923	2233	41083	2449	28034	2638	28032	2855
500	30605	641	40913	750	30392	849	30273	1070	23150	1286	30366	1514	40976	1720	24297	1951	41013	2173	30196	2405	41084	2638	28035	2842	41119	3075

All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Teflex NP Black

PTFE laminate for temperature & chemical extremes



- Non-permeable PTFE laminate that can be used on products across the full pH scale, ie. caustic or acid products will not effect Teflex NP Black
- Capable of running at high and low temperatures
- Designed to dissipate electrical charge - 10⁶ Ω

PHYSICAL PROPERTIES:

Material	Pure PTFE
Weight (±10%)	459g/m ² / 13.5oz/yd ²
Operating Temp Range	-73 - 300°C / -99 - 572°F (surge to 316°C / 600°F)
Surface Resistivity (Ohms)	10 ⁶

Maximum Diameter:	500mm
Maximum Length:	1,000mm
Available with SS Rings?	Yes
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Expect shorter life-span if used # All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	41175	256	41176	275	29938	343	29859	456	29858	540	29631	612	41296	678	29820	702	41297	766	41313	848
100	40873	256	41060	275	29093	343	29041	456	29043	540	29042	612	29787	678	29531	702	29532	766	29816	848
150	41042	284	41061	343	29106	376	29124	470	29133	558	29087	628	29788	750	29506	874	41298	985	29844	1098
200	41043	304	41062	363	29108	393	28819	479	29135	569	28718	662	29552	804	29501	936	29510	985	40152	1098
250	41044	382	41063	438	29127	459	29071	646	29137	763	29147	862	29927	993	29489	1127	29760	1256	41314	1391
300	41045	422	41064	486	29129	510	29078	680	29144	803	29080	946	29763	1104	29845	1254	41299	1396	41295	1546
350	41046	460	41065	533	41179	603	29629	758	41253	913	29800	1074	29910	1215	41282	1379	41300	1536	29924	1701
400	41047	499	41066	580	29601	657	29757	827	29936	994	40657	1170	40764	1326	41283	1504	41301	1676	29925	1856
450	41048	538	41067	627	29602	710	29535	895	40188	1075	40658	1267	40765	1437	29511	1631	40337	1815	29926	2010
500	41049	576	41068	675	40174	764	29852	963	29630	1157	29930	1363	41271	1548	29513	1756	41302	1955	41315	2165
550	41050	615	41069	722	41180	818	41247	1032	29937	1239	41261	1459	41272	1659	41284	1882	41303	2095	41316	2319
600	41051	655	41070	769	41181	871	40269	1099	40232	1320	41262	1556	41273	1770	41285	2008	41304	2234	41317	2474
650	41052	693	41071	817	41241	925	41248	1168	41254	1402	41263	1652	41274	1881	41286	2134	41305	2374	41318	2629
700	41053	732	41072	863	41242	978	41249	1236	41255	1484	41264	1748	41276	1992	41287	2259	41306	2514	41319	2783
750	41054	771	41073	911	41243	1032	41250	1304	41256	1565	41265	1845	41277	2103	41288	2385	41307	2654	41320	2938
800	41055	809	41074	958	40355	1085	40872	1373	41257	1647	41266	1941	41278	2214	41289	2511	41308	2794	41321	3093
850	41056	849	41075	1006	41244	1139	41251	1440	41258	1728	41267	2037	41279	2324	41290	2636	41309	2933	41322	3248
900	41057	888	41076	1053	41245	1192	40663	1509	41259	1809	41268	2134	41280	2436	41291	2763	41310	3073	41323	3403
950	41058	926	41077	1100	41246	1246	41252	1577	41260	1892	41269	2230	41281	2547	41292	2888	41311	3213	41324	3558
1000	41059	965	41078	1147	29972	1299	40346	1645	40133	1973	40343	2327	41293	2657	41294	3013	41312	3353	41325	3712



The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Teflex NP Opaque

Semi-transparent PTFE laminate for temperature & chemical extremes



- Non-permeable PTFE laminate that can be used on products across the full pH scale, ie. caustic or acid products will not effect Teflex NP Opaque
- Capable of running at high and low temperatures
- Semi-transparent to allow product-flow visibility

PHYSICAL PROPERTIES:

Material	Pure PTFE
Weight (±10%)	459g/m² / 13.5oz/yd²
Operating Temp Range	-73 - 300°C / -99 - 572°F (surge to 316°C / 600°F)
Surface Resistivity (Ohms)	Insulative

Maximum Diameter:	500mm
Maximum Length:	1,000mm
Available with SS Rings?	Yes
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Expect shorter life-span if used # All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	41177	256	41178	275	29900	343	40250	456	41356	540	40247	612	40252	678	41396	702	41412	766	40749	848
100	41137	256	41156	275	40649	343	29934	456	29687	540	40256	612	40248	678	40630	702	41413	766	40251	848
150	41138	284	41157	343	29861	376	29933	470	29943	558	40246	628	41381	750	40661	874	41414	985	41430	1098
200	41139	304	41158	363	40249	393	29905	479	40270	569	29751	662	40245	804	40852	936	29963	985	41431	1098
250	41140	382	41159	438	40639	459	29866	646	41357	763	29850	862	41009	993	41397	1127	29907	1256	40638	1391
300	41141	422	41160	486	29929	510	29847	680	29848	803	29849	946	29906	1104	29846	1254	41415	1396	41432	1546
350	41142	460	41161	533	41328	603	41343	758	41007	913	41008	1074	41382	1215	41398	1379	41416	1536	41433	1701
400	41143	499	41162	580	29904	657	40746	827	41358	994	40832	1170	41383	1326	41399	1504	41417	1676	41434	1856
450	41144	538	41163	627	41329	710	41344	895	41359	1075	41370	1267	41384	1437	41400	1631	41418	1815	41435	2010
500	41145	576	41164	675	41330	764	40874	963	41360	1157	41371	1363	41385	1548	41401	1756	41419	1955	41436	2165
550	41146	615	41165	722	41331	818	41345	1032	41361	1239	41372	1459	41386	1659	41402	1882	41420	2095	41437	2319
600	41147	655	41166	769	41332	871	41346	1099	41362	1320	40888	1556	41387	1770	41403	2008	41421	2234	41438	2474
650	41148	693	41167	817	41333	925	41347	1168	41363	1402	41373	1652	41388	1881	41404	2134	41422	2374	41439	2629
700	41149	732	41168	863	41334	978	41348	1236	41364	1484	41374	1748	41389	1992	41405	2259	41423	2514	41440	2783
750	41150	771	41169	911	41335	1032	41349	1304	41365	1565	41375	1845	41390	2103	41406	2385	41424	2654	41441	2938
800	41151	809	41170	958	41336	1085	40875	1373	41366	1647	41376	1941	41391	2214	41407	2511	41425	2794	41442	3093
850	41152	849	41171	1006	41337	1139	41352	1440	41367	1728	41377	2037	41392	2324	41408	2636	41426	2933	41443	3248
900	41153	888	41172	1053	41338	1192	41353	1509	41368	1809	41378	2134	41393	2436	41409	2763	41427	3073	41444	3403
950	41154	926	41173	1100	41339	1246	41354	1577	41369	1892	41379	2230	41394	2547	41410	2888	41428	3213	41445	3558
1000	41155	965	41174	1147	41342	1299	41355	1645	40351	1973	41380	2327	41395	2657	41411	3013	41429	3353	41446	3712

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

LM3

100% Woven polypropylene - breathable & suitable for low temperatures



- Ideal for low temperature environments (down to -70°C/-94°F)
- Perfect for food processing, especially when some breathability is required to alleviate pressure.

PHYSICAL PROPERTIES:

Material	100% woven polypropylene	
Weight (±10%)	295g/m ² / 8.7oz/yd ²	
Operating Temp. Range	-70 to 94°C / -94 to 201°F (surge to 107°C / 225°F)	
Air Permeability	(cm ³ /cm ² /sec@125Pa)	(ft ³ /ft ² /min@0.5" wg)
	13	25

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	1,500mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	3-A 60-64	FDA	FOOD SAFETY	ATEX

All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings
Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	50671	76	51087	79	50768	84	50670	93	50709	102	50623	107	51206	123	51227	131	51248	146	51274	168	51298	181	51327	192	51355	203
100	50602	76	50522	79	50539	84	50520	93	50540	102	50541	107	50542	123	50543	131	50544	146	50603	168	50647	181	51328	192	50707	203
150	50628	78	50672	80	50521	84	50546	94	50665	103	50622	113	51207	124	50669	133	51619	146	50604	171	51299	182	50777	194	51356	206
200	50701	89	51088	92	25277	96	50519	96	50532	105	50552	119	50715	127	50553	141	50783	153	50605	176	51300	188	51329	199	51357	212
250	50710	92	51089	96	50594	101	50626	115	50627	129	50625	139	50789	154	50711	178	51249	197	50780	218	51301	265	51330	278	51358	290
300	30751	96	50751	100	26870	105	26871	120	25275	135	50644	145	50645	161	51476	185	51250	205	50613	227	51302	272	51331	286	51359	300
350	51066	100	51090	104	51139	110	50641	125	25276	140	50723	152	50747	167	51753	192	51251	213	51275	235	51303	280	51332	295	51360	309
400	51067	104	50750	109	50722	115	50759	130	50754	145	25296	158	50767	174	51228	200	51252	220	26701	244	51304	289	51333	304	51361	318
450	50525	107	50752	113	50535	119	50736	135	50746	151	26837	165	51057	181	26838	207	51253	228	51276	253	51305	296	50656	312	51362	328
500	50526	111	51091	117	50634	124	50635	140	26921	157	26923	171	51208	188	51754	215	51254	235	51277	260	51306	304	51334	320	51363	337
550	51068	115	51092	122	51140	129	51154	145	51171	162	51188	178	51209	195	51229	221	51255	243	51278	269	51307	312	51335	329	51364	346
600	51138	118	51093	126	50776	133	50774	150	50708	168	50652	184	50787	202	51230	229	51256	251	51279	278	51308	320	51336	337	51365	356
650	51069	123	51094	130	51141	138	51155	155	51172	174	51189	190	51210	209	51231	236	51257	258	51280	286	51309	328	51337	346	51366	365
700	51070	126	51095	135	51142	143	50779	160	51173	179	51190	196	51211	216	51232	244	51258	266	51281	295	51310	336	51338	355	51367	374
750	51071	129	51096	139	51143	148	51156	165	51174	184	51191	203	51212	223	50705	251	50706	273	51282	303	51311	343	51339	363	51368	384
800	51072	133	51097	143	51755	153	50775	170	50712	190	51192	209	51213	229	51233	259	51259	281	51283	312	51312	351	51340	372	51369	393
850	51073	137	51098	148	51144	157	51157	175	51175	195	51193	216	51214	236	51234	266	51260	289	51284	320	51313	359	51341	381	51370	402
900	51074	141	51099	152	51145	162	51158	180	51176	201	51194	222	51752	243	51235	273	51261	296	51285	329	51314	367	51342	389	51371	412
950	51075	145	51100	156	51146	167	51159	185	51177	207	51195	229	51215	251	51236	281	51262	304	51286	337	51315	375	51343	398	51372	421
1000	51076	148	51101	160	51487	171	51160	190	26922	212	50655	235	51216	257	51237	287	51263	312	51287	346	51316	383	51344	406	51373	431

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

LM4

100% woven Polyester - suitable for higher temperatures



- Used for higher temperature environments (up to 130°C / 266°F).
- Ideal for use where air needs to be vented through the walls of the flexible connector.

PHYSICAL PROPERTIES:

Material	100% woven polyester fibre	
Weight (±10%)	393g/m² / 11.6oz/yd²	
Operating Temp Range	-55 - 130°C / -48 - 266°F (surge to 150°C / 302°F)	
Air Permeability	(cm³/cm²/sec@125Pa)	(ft³/ft²/min@0.5" wg)
	0.4	0.8

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	1,500mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?*	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)
*to Max. Operating Temp of 110°C / 230° F	

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

#All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	26101	76	41664	79	50506	84	26344	93	50507	102	26239	107	29840	123	26262	131	21453	146	26305	168	41665	181	41666	192	41667	203
100	20900	76	51000	79	20901	84	20902	93	20903	102	20904	107	20905	123	20906	131	20907	146	20908	168	20909	181	20910	192	20911	203
150	20509	78	51001	80	19569	84	50009	94	50014	103	50015	113	50406	124	22089	133	50424	146	50425	171	50426	182	50427	194	50428	206
200	20912	89	51002	92	21847	96	19399	96	20510	105	20511	119	20512	127	20483	141	20513	153	20514	176	20515	188	20516	199	20517	212
250	25238	92	50140	96	21987	101	21477	115	21614	129	21812	139	22897	154	21622	178	22927	197	26531	218	40791	265	24391	278	28822	290
300	20914	96	50137	100	20915	105	20916	120	21924	135	20918	145	20919	161	20920	185	20921	205	20922	227	20923	272	20924	286	20925	300
350	25595	100	23146	104	21883	110	22367	125	50004	140	22852	152	20314	167	26532	192	50523	213	26533	235	29965	280	41226	295	41233	309
400	20926	104	28689	109	20927	115	20928	130	20929	145	20650	158	20931	174	20932	200	20933	220	20934	244	20935	289	20936	304	20937	318
450	26254	107	29187	113	22366	119	22800	135	50404	151	50405	165	50407	181	50499	207	29589	228	28349	253	50501	296	26567	312	24486	328
500	22758	111	23206	117	20939	124	22208	140	20941	157	20942	171	20943	188	24296	215	20945	235	25410	260	20947	304	20948	320	20949	337
550	26381	115	41192	122	28688	129	26243	145	41201	162	29564	178	24809	195	41207	221	41209	243	41213	269	41219	312	41227	329	41234	346
600	20956	118	28431	126	20957	133	20958	150	20959	168	20960	184	20961	202	20962	229	20963	251	20964	278	20965	320	20966	337	20967	356
650	26141	123	41193	130	26087	138	25862	155	28716	174	23017	190	41206	209	22376	236	41210	258	41214	286	41220	328	41228	346	23199	365
700	41188	126	41194	135	50013	143	22132	160	22131	179	25669	196	23228	216	41208	244	29585	266	21355	295	41221	336	41229	355	41235	374
750	26346	129	50619	139	41197	148	24951	165	23051	184	22965	203	40237	223	25642	251	24955	273	21754	303	41222	343	41230	363	41236	384
800	20968	133	25560	143	50673	153	20970	170	20971	190	21903	209	20973	229	20974	259	20975	281	41215	312	20977	351	20978	372	20979	393
850	41189	137	25561	148	41198	157	22163	175	41202	195	41204	216	24833	236	24835	266	25111	289	41216	320	41223	359	41231	381	41237	402
900	41190	141	41195	152	41199	162	22162	180	24283	201	21901	222	24834	243	22395	273	41211	296	41217	329	41224	367	22982	389	41238	412
950	41191	145	41196	156	41200	167	25966	185	41203	207	41205	229	40111	251	24836	281	41212	304	41218	337	41225	375	41232	398	41239	421
1000	20980	148	25607	160	20981	171	21878	190	20983	212	20985	235	26215	257	20986	287	20987	312	20988	346	20989	383	20990	406	20991	431

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

FM1 Breather

Woven polyester breather bag for venting contained vessels



- Designed for breathing applications such as venting hoppers and other contained vessels
- The BFM® breather may become required as the BFM® connectors create a 100% sealed system.

PHYSICAL PROPERTIES:

Material	100% woven polyester needlefelt	
Weight (±10%)	550g/m² / 16.22oz/yd²	
Operating Temp Range	-20 - 130 °C / -4 - 266 °F (surge to 150 °C / 302 °F)	
Air Permeability	(cm³/cm²/sec@125Pa)	(ft³/ft²/min@0.5" wg)
	17	33

Maximum Diameter:	650mm
Maximum Length (≤ Ø650mm):	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
100	30544	101	30711	105	30553	108	30562	113	30546	118	30612	128	30807	133	31234	173	30608	203	30654	252	31421	309	31422	327	31424	346
150	30534	101	30668	105	30566	110	30590	113	30716	118	30635	128	30632	134	31235	175	30669	203	31254	254	31426	314	31441	331	31455	351
200	30528	101	30533	105	30569	110	30530	114	30602	119	30629	128	30630	135	30572	177	30689	203	31255	257	31427	318	31167	336	31456	356
250	30540	101	30576	106	30586	111	30601	118	30588	121	30607	129	31229	137	31236	182	31243	204	30805	260	31428	323	31442	340	31457	361
300	30517	102	30525	106	30258	113	30334	119	30545	121	30615	129	30631	138	30604	188	31244	204	30532	260	31429	328	31443	345	31458	365
350	30661	107	30625	108	30600	113	30535	120	30624	125	30637	129	31207	140	31237	190	31245	205	31256	267	31430	332	31444	349	31459	370
400	30589	110	30702	110	30542	113	30567	120	30537	126	30551	129	31022	140	31238	192	30955	206	31201	273	31431	336	31445	354	31460	375
450	30568	110	30666	118	30585	126	30656	132	30791	149	31206	155	31004	163	31239	203	30593	210	31257	281	31432	341	31446	358	31461	380
500	30515	124	30640	127	30548	131	30539	133	30513	149	30557	157	30667	167	30559	209	30598	218	30597	287	31433	345	31447	362	31462	384
550	31200	125	31214	129	30616	135	30606	143	30963	149	30937	159	31230	167	30704	217	31246	220	30623	293	31434	350	31448	367	31463	389
600	30571	126	30854	135	30583	135	30580	143	30541	150	30717	159	30985	167	31240	218	31247	220	30840	297	31435	354	30543	371	31464	394
650	30718	126	31215	135	30610	135	30662	143	30783	150	30619	161	31231	168	31241	218	31248	221	31258	301	31436	359	31449	376	31465	399
700	32190	129	31216	135	30878	135	30688	154	30660	154	30646	162	30956	169	31242	220	32110	222	30671	304	30577	363	31450	381	31466	404
750	30757	135	31217	135	30621	135	30645	154	30524	154	30676	163	31232	174	30850	220	31249	232	31259	308	30574	368	31451	385	31467	409
800	30613	135	31218	135	30614	135	30563	155	30633	156	30558	164	30971	176	30560	223	31250	243	31260	311	31437	372	30651	389	31468	413
850	31210	139	31219	156	30611	156	31222	162	31224	163	31227	178	31182	189	31183	229	31251	254	31261	315	31438	376	31452	394	31469	418
900	31211	142	31220	157	30581	176	30659	176	31225	178	32116	190	31181	201	30808	234	32109	265	31262	318	31439	382	31453	398	31470	423
950	31212	145	31221	160	31180	176	31223	177	31226	179	31228	192	31233	202	31190	240	31252	275	31263	321	31440	387	31454	403	31296	426
1000	32091	148	30674	162	30675	176	30617	178	30564	180	30626	192	30591	203	30677	245	31253	284	30650	324	30516	392	31423	407	31289	430

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of an FM1 Breather Bag, please refer to the 'Add-ons' page 6.

Blanking Cap (Seeflex 040E)

Prevents contamination/used as sight-glasses



- Used to prevent contamination during clean down or change-over.
- They protect products and prevent dust emission into the factory.
- Ideal as sight-glasses for sifters, and other equipment.

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Height (Length)	30mm (1 3/16")

Maximum Diameter: 1,650mm
Available as TR (Tool Release) option? Yes (≤ 650mm)

✓

VIBRATION

✓

OSCILLATION

✗

COMPRESSION

✓

DUST TIGHT

✓

FOOD SAFETY

✓

ATEX

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
	20750	87	20761	91	20751	93	20752	101	20709	110	20753	124	20754	145	20755	170	20756	183	20757	222	20758	275

DIA:	Ø600mm		Ø650mm		Ø700mm		Ø750mm		Ø800mm		Ø850mm		Ø900mm		Ø950mm		Ø1,000mm		Ø1,050mm		Ø1,100mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
	20759	297	20760	312	21865	539	22868	550	21476	554	25086	563	28285	579	60013	601	21866	727	24667	781	21867	797

DIA:	Ø1,150mm		Ø1,200mm		Ø1,250mm		Ø1,300mm		Ø1,350mm		Ø1,400mm		Ø1,450mm		Ø1,500mm		Ø1,550mm		Ø1,600mm		Ø1,650mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
	22382	852	25197	888	22345	932	29391	994	26468	1040	40402	1085	24668	1128	24576	1278	40403	1330	26743	1380	28202	1438



The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a Tool Release version of a Blanking Cap, please refer to the 'Add-ons' page 6.

Blanking Bin (Seeflex 040E)

Ideal for sifter oversize collection bins



- Used for collecting overs/reject product on sifters/sieves etc.
- Can be lined with plastic bags for easy disposal of reject product.
- Allows for visibility of product full level and reject consistency.

PHYSICAL PROPERTIES:

Material	Seeflex ether-based thermoplastic polyurethane
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Height (Length)	30mm (1 1/16")

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings:	Yes (≤ Ø500mm)
Available with Plastic Rings:	No
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION

OSCILLATION

COMPRESSION

DUST TIGHT

FOOD SAFETY

ATEX

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
100	25117	140	29059	149	22733	163	24323	170	22732	188	24437	217	25868	230	26258	296	27033	336	26129	388	29568	428	27032	470	40397	512
150	22851	143	21852	154	25630	168	21709	178	28216	197	21589	229	26194	244	28011	310	24451	351	40474	406	40487	447	40504	490	40521	533
200	21576	146	23022	157	22744	174	24360	186	25350	207	22546	240	26193	257	26709	325	40461	367	29222	422	25870	465	40505	510	40522	554
250	24779	149	22352	162	21309	178	25379	193	24450	217	23039	252	28226	271	40444	339	40462	382	40476	439	40489	484	40506	529	40523	576
300	21967	152	22161	166	21458	183	22878	201	26319	227	25869	264	25842	285	27125	353	50510	398	26624	456	40490	502	40507	549	40524	597
350	21170	155	21804	170	24774	188	60020	208	26176	237	40434	276	25843	300	40445	367	40464	413	40477	473	40491	521	40508	569	40525	618
400	21520	158	22353	174	24638	193	21171	216	23207	246	28530	287	25241	314	29004	381	21908	428	24531	490	40492	539	40509	589	40526	640
450	22946	162	26467	178	22742	198	22231	223	26454	257	22042	298	26200	328	24464	395	28942	444	40479	507	40493	558	40510	609	40527	661
500	22716	165	22212	182	22528	203	21791	231	22885	267	25199	310	25844	342	24938	409	26334	459	28874	523	40494	576	40511	628	40528	683
550	22717	168	40423	186	24755	208	26598	239	27052	277	26950	321	40438	356	40455	423	40467	475	40480	540	40495	594	40512	648	40529	704
600	60012	171	24563	190	24306	213	22088	246	22530	286	22087	333	22487	370	24939	437	40468	490	28332	558	40496	613	40513	668	40530	725
650	26789	174	26798	194	24777	218	24456	254	40432	296	28702	345	40439	384	26337	451	40469	506	40481	575	40497	631	40514	688	40531	747
700	40415	177	26478	198	60017	223	22760	261	25210	306	28068	357	24727	398	25388	465	40470	522	40482	591	40498	650	40515	708	40532	768
750	27126	180	40427	203	25327	228	28514	269	21719	317	28151	368	40440	412	40457	479	24970	537	28072	608	40499	669	40516	728	40533	789
800	25425	183	29198	206	22759	232	22787	276	23156	326	24346	380	26540	426	25394	493	40472	552	40483	625	40500	687	40517	747	40534	811
850	25753	187	40428	210	29600	238	22756	284	29039	336	40435	392	40441	440	24776	508	40473	567	40484	642	40501	706	40518	767	40535	832
900	40417	190	40429	215	25663	242	26014	292	26013	346	25692	403	25780	455	40459	522	25186	583	40485	659	40502	725	40519	786	40536	853
950	40418	193	40430	218	29250	247	28446	299	24794	356	25727	414	40443	469	40460	536	29674	598	40486	676	40503	743	40520	806	40537	875
1000	60026	196	29038	223	60027	253	60028	307	25892	366	25057	426	40385	483	40389	550	28772	614	40391	692	40398	761	40406	827	40407	896

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a Tool Release version or to add Rings, please refer to the 'Add-ons' page 6.

Kevlar Cover

Flame resistant cover to reduce the risk of consequential fires



- Typically used in over pressure and potentially explosive applications.
- Designed to fit over existing connectors and tightened onto the BFM® spigot using butterfly clamps.

PHYSICAL PROPERTIES:

Material	Woven Kevlar (Aramid) fibre
Weight (±10%)	447g/m² / 13.2oz/yd²
Max. Operating Temp	260°C / 500°F (surge to 300°C / 572°F) (NB: Limited to max. operating temperature of connector underneath)

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Does not come in contact with product therefore can be used in conjunction with a 3A certified inner connector

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	80273	300	80274	305	80049	309	80130	320	80137	332	80136	341	80135	345	80131	360	80327	381	80141	402	80345	423	80133	444	80134	467
100	80044	300	80123	305	80089	309	80022	320	80068	332	80030	341	80031	345	80098	360	80099	381	80041	402	80055	423	80122	444	80077	467
150	80026	308	80124	315	80025	321	80034	344	80086	357	80023	371	80011	386	80043	400	80085	427	80058	453	80162	479	80016	500	80079	526
200	80045	318	80109	325	80050	332	80002	344	80027	357	80003	371	80057	386	80029	400	80061	427	80004	453	80013	479	80028	500	80095	526
250	80145	328	80275	337	80108	343	80071	356	80090	373	80129	391	80180	407	80069	425	80174	453	80054	481	80175	509	80173	533	80176	562
300	80046	337	80246	348	80019	354	80018	369	80020	391	80021	410	80172	430	80103	449	80212	479	80116	509	80117	539	80118	564	80114	597
350	80263	347	80276	360	80210	366	80119	381	80226	407	80190	430	80177	451	80104	473	80239	505	80217	536	80346	567	80249	597	80231	633
400	80047	357	80277	371	80248	376	80084	394	80216	425	80150	449	80036	473	80017	498	80037	531	80009	564	80347	597	80359	629	80369	668
450	80264	367	80278	382	80289	388	80297	406	80148	441	80107	469	80208	496	80235	523	80328	558	80163	591	80348	626	80144	662	80214	703
500	80048	376	80279	394	80051	399	80052	419	80053	459	80311	488	80065	517	80066	547	80067	584	80243	619	80349	655	80170	694	80370	739
550	80265	386	80280	406	80186	411	80298	431	80300	475	80386	508	80230	540	80183	572	80329	610	80337	646	80350	684	80360	727	80371	774
600	80222	396	80281	417	80236	422	80229	444	80038	492	80205	527	80178	562	80070	596	80330	636	80338	674	80351	714	80361	759	80372	809
650	80266	406	80282	428	80290	433	80299	457	80302	509	80312	547	80211	584	80322	620	80331	662	80339	702	80352	744	80362	791	80223	845
700	80267	415	80283	439	80291	444	80221	469	80305	526	80313	566	80191	606	80152	644	80153	688	80340	728	80353	772	80363	824	80373	880
750	80268	425	80284	451	80292	456	80301	482	80306	544	80014	586	80097	628	80101	669	80332	714	80096	756	80354	802	80364	856	80374	916
800	80269	435	80285	462	80293	466	80181	494	80106	561	80314	605	80318	650	80323	694	80333	740	80341	783	80355	831	80365	888	80375	951
850	80270	445	80286	474	80294	478	80234	507	80307	578	80315	625	80319	672	80324	718	80334	766	80342	811	80356	860	80366	921	80376	986
900	80271	455	80287	486	80295	489	80303	519	80308	594	80316	644	80320	694	80325	742	80335	792	80343	838	80357	889	80367	953	80377	1022
950	80272	464	80288	497	80296	500	80304	532	80309	612	80317	664	80321	716	80326	767	80336	818	80344	866	80358	919	80368	986	80378	1058
1000	80252	474	80032	508	80253	512	80254	544	80128	628	80255	683	80256	739	80257	791	80258	844	80259	896	80260	949	80261	1019	80262	1093

The prices shown above indicate our Recommended Retail Prices (RRP).

Black-out Cover

Designed for light sensitive applications, fits over our entire connector range.



- The cover cuts out all light and is for use in light sensitive areas
- Designed to fit over existing BFM® connectors.
- Easy to install and no tools are required.

PHYSICAL PROPERTIES:

Material	Polypropylene (wire used for the holders is 6mm 304 stainless steel)
Weight (±10%)	207 g/m² / 6.1 oz/yd²
Max. Operating Temp	95°C / 203°F

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Does not come in contact with product therefore can be used in conjunction with a 3A certified inner connector

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	60057	271	60214	277	60188	281	60184	290	60032	301	60034	309	60037	312	60311	327	60325	345	60189	364	60352	384	60078	403	60381	423
100	60108	271	60234	277	80245	281	60058	290	60033	301	60035	309	60038	312	60039	327	60061	345	60044	364	60074	384	60076	403	60060	423
150	60097	279	60235	285	60046	291	60056	312	60066	323	60036	337	60086	350	60040	363	60201	387	60065	411	60055	435	60219	453	60215	477
200	60220	289	60236	295	60182	301	60030	312	60031	323	60042	337	60048	350	60049	363	60102	387	60045	411	60202	435	60043	453	60187	477
250	60221	297	60237	306	60104	311	60105	323	60073	339	60068	354	60081	370	60064	385	60218	411	60067	437	60353	462	60367	483	60382	509
300	60080	306	60238	316	60178	321	60216	334	60089	354	60287	372	60213	389	60312	407	60099	434	60339	462	60354	488	60368	512	60383	542
350	60222	315	60239	327	60179	332	60262	346	60274	370	60209	389	60300	409	60106	430	60103	458	60340	487	60355	515	60075	541	60384	574
400	60223	323	60240	337	60180	342	60053	357	60275	385	60288	407	60072	430	60088	451	60326	481	60341	512	60356	541	60369	571	60385	606
450	60224	332	60241	347	60253	351	60263	368	60276	400	60289	425	60217	450	60313	474	60327	505	60342	537	60357	568	60370	600	60386	638
500	60183	342	60242	357	60490	362	60264	380	60098	415	60290	443	60181	470	60314	496	60328	528	60343	562	60191	594	60371	630	60493	670
550	60054	350	60243	368	60491	372	60265	392	60277	431	60291	461	60301	489	60315	518	60329	552	60344	587	60358	622	60372	659	60387	702
600	60225	359	60244	378	60254	382	60266	403	60278	447	60292	478	60302	510	60316	540	60330	576	60194	612	60192	648	60205	689	60193	734
650	60226	368	60245	388	60255	393	60267	414	60279	462	60293	496	60303	529	60317	562	60331	600	60345	637	60359	675	60373	717	60388	766
700	60227	376	60246	399	60256	403	60063	425	60280	478	60294	513	60304	550	60318	585	60332	623	60346	662	60360	701	60374	747	60389	798
750	60228	386	60247	409	60257	413	60268	437	60281	493	60295	531	60305	569	60319	606	60333	647	60203	687	60361	728	60375	777	60204	831
800	60229	395	60248	420	60258	423	60269	448	60282	509	60296	549	60306	590	60320	629	60334	670	60347	712	60362	754	60376	806	60391	863
850	60230	404	60249	430	60259	434	60270	459	60283	524	60297	566	60307	610	60321	651	60335	694	60348	737	60363	781	60377	835	60392	895
900	60231	412	60250	440	60260	444	60271	471	60284	539	60210	584	60308	630	60322	673	60336	717	60349	761	60364	807	60378	865	60393	927
950	60232	422	60251	450	60185	453	60272	483	60285	554	60298	601	60309	650	60323	695	60337	741	60350	787	60365	833	60379	894	60394	959
1000	60233	430	60252	461	60261	464	60273	493	60286	570	60299	619	60310	670	60324	717	60338	766	60351	814	60366	860	60380	924	60395	991

The prices shown above indicate our Recommended Retail Prices (RRP).

Bulk Bag Loader

A three-layered, inflatable filling head featuring a stainless steel core fully encased in Seeflex ether-based urethane.



- Includes external air fitting that plugs into an 8mm pneumatic air line to inflate super strong & flexible outer layer.
- Top of loader simply snaps into a BFM® fitting spigot and features a fully encapsulated stainless steel ring to support lower end.
- All Bulk Bag Loaders are a standard length of 330mm.
- Built-in pressure relief valve to prevent over-inflation

PHYSICAL PROPERTIES:

Material	Seeflex -Ether-based thermoplastic polyurethane with stainless steel core
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity(Ohms)	10 ¹⁰

Maximum Diameter: 450mm
Available with SS Rings? No
Available with Plastic Rings? No



DUST TIGHT



FOOD SAFETY



IC 1794/2004



ATEX

#All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings
* Material only

DIA:	Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
330mm*	305078	916	305075	951	304794	986	304793	1022	304791	1057	302363	1092	304828	1163



The prices shown above indicate our Recommended Retail Prices (RRP).

Weighing Bellows



- Made from strong, durable, transparent Seeflex 040E urethane alloy (3A & EU Compliant)
- Patented design provides minimal resistance to absorb vibrations/movement without affecting weighing equipment below
- Asymmetrical conical shape eliminates the possibility of product build-up inside connector, affecting weighing
- BFM® snap-fit blue-band cuff and spigot system means fast, easy installation, cleaning and replacement

DIA:	Ø100mm		Ø150mm		Ø200mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	305216	224	305218	289	305219	353

The prices shown above indicate our Recommended Retail Prices (RRP).

The following products are also available, but due to the variables involved, are quoted on request:

Venting Surge Hopper



- Tapered and angled connector with built-in partition
- Ideal for use as an intermediary hopper above a rotary valve to prevent bridging of product and encourage flow
- Partition allows powder to flow in on one side of the partition and displaced air to flow up and out the other
- Gives visibility of product flow without having to open an inspection hatch
- Easy to remove for cleaning in between product runs

Tapers



- Tapered connectors can be used to reduce the pipe size to direct product into a smaller pipe. A larger diameter pipe can transition into a smaller diameter pipe to reduce flow rate or control flow rate properties. (See 'Hoppers' below)
- Tapers can help reduce wear on connector walls. If you have a small diameter inlet pipe at the top and transition it to a larger diameter outlet pipe below, this allows your product to flow through with minimal contact with the connector walls.

Corner Connector



Corner Connector 040E

- CIP (clean-in-place) wash processes to replace traditional steel tun-dish and swiveling pipework.
- Designed for applications where product/material needs to be transported around a bend.
- Custom diameter and length combinations available (Subject to limitations)



Corner Connector 060ES

- CIP (Clean-In-Place) wash processes to replace traditional steel tun-dish and swiveling pipework.
- Made from pressure-resistant Seeflex 060ES so ideal for high head-pressure CIP applications.
- Custom diameter and length combinations available (Subject to limitations)