


Teflex NP Opaque

- Pure PTFE - semi-transparent to view product flow
- PTFE is capable of running at high temperatures, continuously operating at 300°C / 572°F with short term surges at 316°C / 600°F
- Also remains highly flexible down to -73°C (-99°F)
- Can be used on products across the full pH scale, i.e. caustic and acid products will not effect PTFE
- *Food Grade - compliant to FDA & EU regulations*

Note: Teflex NP is not recommended for use on oscillating applications. For vibrating applications, please discuss with your local BFM® Distributor.

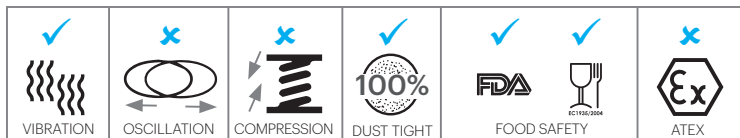

PHYSICAL PROPERTIES:

Fibre	Pure PTFE
Colour	Opaque white
Construction/Finish	Multi-layer film
Weight	458 g/m ² 13.5 oz/yd ²
Thickness	0.23mm / 1/64"
Operating Temp Range	-73 to 300°C -99 to 572°F
Max. Surge Temp	316°C / 600°F
Surface Resistivity (Ohms) <i>(Tested to ASTM D-257)</i>	Insulative
Tensile Strength	350 N/50mm 40 lbs/inch
Tear Strength	156 N / 35lbs
Air Permeability	None

AVAILABLE SIZES:

Diameter	Ø100mm - 500mm <i>(also available in 125mm/5")</i> (Ø4" - 20")
Length	80mm, 100mm - 1,000mm (3", 4" - 39 1/2")

(Size range is in mm, so inch conversions are approximate only. Restrictions apply for larger diameters, or when TR versions used. Refer to 'Connector Sizes' for more information)

COMPLIANCE:

Complies with the following regulations:
FDA 21 CFR 177.1550, USDA, (EC) 1935/2004 & 10/2011.

The BFM® cuff and spigot system is 3A certified 63-04 sanitary fitting.