


Teflex Woven

- Teflex Woven is a pure woven PTFE.
- Teflex Woven is capable of running at high temperatures.
- Continuously operating at 260°C / 500°F with short term surges at 280°C / 536°F.
- Can be used on products across the full pH scale, i.e. either caustic or acid products will not effect Teflex Woven.

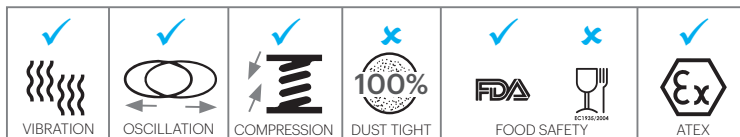

PHYSICAL PROPERTIES:

Fibre	PTFE
Colour	Natural (dark brown)
Construction/finish	Basket weave
Weight	678 g/m ² 20 oz/yd ²
Thickness (mm)	0.5mm / 1/64"
Max. Operating Temp	260°C / 500°F
Max. Surge Temp	280°C / 536°F
Low Temp Flexibility	Good
Surface Resistivity (Ohms) <i>(Tested to ASTM D-257)</i>	Insulative

<i>Minimum Tensile Strength measured as a force over a 25mm wide Ravel Strip</i> <i>(Test Standard: ASTM D5035)</i>	Fabric Warp 90) Weft 100) kgf/25mm
--	--

Ultimate Elongation (%) <i>(Test Standard: ASTM D5035)</i>	55
---	----

Air Permeability:	
(cm ³ /cm ² /sec@125Pa)	0.3
(ft ³ /ft ² /min@0.5" wg)	0.5

AVAILABLE SIZES: *(in 50mm / 2" increments)*

Diameter <i>(also available in 125mm/5")</i>	Ø100mm, 150mm to 1,650mm (4", 5" to 65")
---	--

Length	80mm , 100mm to 1,500mm (3", 4" to 59 1/8")
--------	---

NB: Some size restrictions apply for TR versions, larger diameters and connectors with rings.

COMPLIANCE:

Atex Compliant: IBEU tested. Can be used in certain dust explosion hazardous areas (restrictions apply).
PTFE is compliant with FDA 21 CFR 177.1550, 178.3297.

The BFM® cuff and spigot system is a 3A certified 63-04 sanitary fitting.