



Recommended Retail Price

The prices indicated in this document are our Recommended Retail Prices (RRP). There may be slight price variations in local markets.

These prices are based on a NZD/USD exchange rate of 1 NZD:0.60 USD. Exchange rates are reviewed at the end of each month. If there is a movement greater than 5% to this rate then the price list will be updated & uploaded by working day 5 of the following month. End of month rates are obtained from <https://www.reuters.com/markets/currencies>

BFM[®] STANDARD RANGE

Connectors • Caps • Covers • Spigots

Contents

Spigots01

Lipped Spigot 01

Seeflex 02

Seeflex 040E02

Seeflex 040AS03

Seeflex 020E04

Seeflex 060ES05

Add-Ons 06

TR (Tool Release)06

TR (Tool Release) Tools06

‘Smiley Face’ Hole Punch06

TR Lock-Out Safety System06

Quick Access Port07

Rings07

Flexi 08

Flexi / Flexi-Light08

Flexi-Earthed09

Teflex10

Teflex Woven10

Teflex NP Black11

Teflex NP Opaque12

LM3 13

LM4 14

FM1 Breather15

Blanking Cap (Seeflex 040E) 16

Blanking Bin (Seeflex 040E)17

Kevlar Cover..... 18

Black-out Cover 19

Bulk Bag Loader 20

Other Products21

Weighing Bellows 21

Venting Surge Hopper 21

Tapers 21

Corner Connector (040E & 060ES) 21

Spigots

Welds to your pipes to allow snap-in fitting of BFM® connectors



- Available in 304L SS and 316L SS (Hastelloy available on request)
- The spigot design is slightly tapered, so the OD at the top of the tail is 5mm / 1/8" greater than the base
- BFM® spigots are 89mm (3 1/2") in total length - made up of a head of 37mm (1 3/4") and a 'tail' that is 52mm (2") long

PHYSICAL PROPERTIES:

Material	304L SS or 316L SS
Wall Thickness	2.0mm/ 5/64"

Note:

- The 'tail' of the spigot can be cut to tailor the perfect fit for your available space (ensure caution is used when welding not to distort spigot head).
- Download the BFM® IG (Installation Gap) Calculator App to ensure correct between spigots before welding or contact your BFM® Distributor for help.



DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304L SS	20000	124	21287	125	20001	128	20002	139	20003	160	20004	179	20005	202	20006	228	20007	247	20008	286	20009	340	20010	372	20011	387
316L SS	20020	196	21288	200	20021	225	20022	248	20023	274	20024	312	20025	358	20026	404	20027	487	20028	508	20029	556	20030	570	20031	578

* Ø100mm measured externally (OD), all other Ø measured internally (ID).

DIA:	Ø700mm		Ø750mm		Ø800mm		Ø850mm		Ø900mm		Ø950mm		Ø1,000mm		Ø1,050mm		Ø1,100mm		Ø1,150mm		Ø1,200mm		Ø1,250mm		Ø1,300mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304L SS	20012	803	20013	907	20014	995	20015	1100	20016	1139	20017	1256	20018	1282	22222	1361	21203	1553	22815	1546	21161	1600	21434	1610	20019	1631
316L SS	20032	882	20033	959	20034	1286	20035	1415	20036	1514	20037	1526	20038	1552	22794	1657	21853	1757	22795	1770	21934	1817	25426	1913	60022	2010

DIA:	Ø1,350mm		Ø1,400mm		Ø1,450mm		Ø1,500mm		Ø1,550mm		Ø1,600mm		Ø1,650mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304L SS	21435	1651	21436	1670	22223	1763	21125	1864	22802	1942	21012	2252	21121	2265
316L SS	25406	2116	25427	2205	25432	2327	22317	2458	25428	2564	25429	2671	22007	2989

Tool Release Holes: Spigots can be supplied with standard round tool-release holes pre-drilled or smiley-face tool release holes pre-punched for an additional fee of US\$30 per hole. **PLEASE NOTE:** These pre-drilled/punched TR spigots have different part numbers to those shown here.

Lipped Spigot

Allows easy integration with quick-connect, clamped modular tubing/piping systems

To enable a BFM® fitting system to be integrated with 'quick connect' modular tubing/piping, a range of our 304SS spigots are available with a 6mm rolled 'lip'. The lip of the spigot clamps in place with the corresponding modular lip using quick-release clamp systems like Jacob.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
304L SS	20039	160	20040	163	20041	164	20042	175	20043	196	20044	215	20045	238	20046	264



NOTE: a BFM® Lipped Spigot has a 6mm shorter overall height/ length of 83mm.

The prices shown above indicate our Recommended Retail Prices (RRP) per spigot - to fit a standard BFM® connector as a sealed, flexible connection, you will need two spigots (ie. one top, one bottom.)

Seeflex 040E

Strong, resilient, multi-purpose connector



- Used on all types of stationary, vibratory and gyratory sifters, screeners, feeders, bin discharges, hoppers, conveyors, any packing or product handling equipment.
- Superior wear resistance - used in CIP and washing.
- Available as a specially-marked “ Wash Sleeve “version (add US\$8 to price below).
- Available as Quick Access Port option

- Maximum Diameter: 1,650mm
Maximum Length (≤ Ø650mm): 6,000mm
Available with SS Rings? Yes (≤ Ø500mm)
Available with Plastic Rings? Yes
Available as TR (Tool Release) option? Yes (≤ Ø650mm)

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity (Ohms)	10 ¹⁰

VIBRATION

OSCILLATION

COMPRESSION

DUST TIGHT

FOOD SAFETY

ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	21871	87	22554	97	21756	100	21395	116	21259	133	21969	152	21984	169	22564	206	22566	227	22166	257	22569	266	22573	322	22413	340
100	20050	91	22000	103	20061	106	20072	122	20083	140	20094	161	20105	179	20116	217	20127	239	20138	260	20149	279	20160	340	20171	358
150	20051	95	22001	104	20062	113	20073	127	20084	145	20095	167	20106	186	20117	232	20128	252	20139	262	20150	292	20161	352	20172	373
200	20052	98	22002	110	20063	121	20074	133	20085	153	20096	175	20107	196	20118	238	20129	265	20140	275	20151	307	20162	370	20173	392
250	20053	112	22168	131	20064	137	20075	163	20086	190	20097	214	20108	248	20119	291	20130	336	20141	352	20152	394	20163	463	20174	491
300	20054	121	22247	145	20065	147	20076	176	20087	205	20098	235	20109	268	20120	316	20131	361	20142	378	20153	424	20164	501	20175	532
350	20055	126	22555	155	20066	158	20077	179	20088	239	20099	241	20110	278	20121	335	20132	368	20143	404	20154	431	20165	527	20176	579
400	20056	128	22071	160	20067	158	20078	179	20089	242	20100	242	20111	286	20122	335	20133	388	20144	406	20155	454	20166	529	20177	581
450	20057	140	22556	175	20068	172	20079	206	20090	252	20101	278	20112	307	20123	373	20134	413	20145	450	20156	484	20167	578	20178	617
500	20058	147	22003	177	20069	181	20080	217	20091	282	20102	293	20113	312	20124	393	20135	436	20146	474	20157	509	20168	608	20179	650
550	20059	158	22557	182	20070	187	20081	235	20092	289	20103	306	20114	328	20125	431	20136	488	20147	521	20158	562	20169	668	20180	711
600	20060	162	21386	184	20071	188	20082	236	20093	299	20104	311	20115	339	20126	463	20137	518	20148	559	20159	605	20170	712	20181	748
650	22552	166	22558	189	21385	200	21208	256	21955	300	21742	333	22562	351	22500	466	22567	521	22170	563	22572	610	22577	715	22578	765
700	21278	167	22559	190	21231	211	21569	267	21353	313	22280	334	22563	368	21405	468	22249	523	21262	569	22571	613	22576	718	22579	768
750	22553	169	22560	201	21794	213	21560	269	21691	314	22338	338	23005	401	22252	479	22568	551	22506	574	22570	646	22575	748	22580	793
800	20570	170	21387	215	20571	214	20572	270	20573	316	20574	355	20575	401	20576	484	20577	561	20578	577	20579	667	20580	751	20581	794
850	24431	203	25562	226	21675	254	21839	300	22874	350	24964	403	24496	410	24771	512	26756	603	26657	626	40695	730	40696	785	40697	844
900	24593	212	28310	236	21943	265	21257	314	21786	363	21282	419	23088	431	21956	538	24320	628	22748	656	40726	761	22803	818	40728	879
950	22855	222	40724	246	22326	277	21607	328	22169	377	22099	435	24424	453	29732	562	21561	653	40725	686	40727	791	26267	850	26453	914
1000	20590	230	21468	255	20591	289	20592	341	20593	391	20594	450	20595	475	20596	586	20597	678	20598	716	20599	821	20600	883	20601	949

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Seeflex 040AS

Designed to dissipate static, ideal for potentially explosive areas



- Semi - transparent, 'anti-static' connector, designed to dissipate static
- Excellent abrasion, chemical and puncture resistance

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy with an anti-static infusion
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 95°C / -13 to 203°F (surge to 100°C to 212°F)
Surface Resistivity (Ohms)	10 ⁸ (very good at dissipating static)

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	70082	108	70098	123	70114	131	70130	148	70146	168	70162	194	70178	215	70194	266	70210	292	70226	339	70242	347	70258	437	70274	445
100	70083	113	70099	130	70115	137	70131	155	70147	176	70163	204	70179	227	70195	279	70211	312	70227	349	70243	365	70259	441	70275	467
150	70084	114	70100	140	70116	153	70132	163	70148	189	70164	218	70180	242	70196	304	70212	338	70228	352	70244	392	70260	472	70276	501
200	70085	122	70101	141	70117	161	70133	168	70149	199	70165	230	70181	256	70197	315	70213	355	70229	371	70245	413	70261	496	70277	527
250	70086	129	70102	153	70118	166	70134	194	70150	230	70166	268	70182	274	70198	355	70214	412	70230	432	70246	487	70262	568	70278	606
300	70087	136	70103	155	70119	174	70135	204	70151	242	70167	282	70183	319	70199	373	70215	433	70231	455	70247	512	70263	598	70279	638
350	70088	142	70104	164	70120	184	70136	209	70152	291	70168	300	70184	331	70200	401	70216	448	70232	493	70248	529	70264	638	70280	682
400	70089	145	70105	190	70121	187	70137	210	70153	297	70169	312	70185	344	70201	401	70217	471	70233	493	70249	556	70265	640	70281	685
450	70090	161	70106	206	70122	209	70138	247	70154	334	70170	340	70186	379	70202	444	70218	497	70234	544	70250	588	70266	698	70282	748
500	70091	169	70107	220	70123	217	70139	259	70155	351	70171	356	70187	391	70203	467	70219	524	70235	572	70251	619	70267	736	70283	788
550	70092	184	70108	224	70124	225	70140	306	70156	368	70172	381	70188	452	70204	521	70220	589	70236	645	70252	697	70268	823	70284	878
600	70093	198	70109	227	70125	227	70141	308	70157	370	70173	386	70189	492	70205	558	70221	635	70237	708	70253	758	70269	877	70285	910
650	70094	199	70110	232	70126	248	70142	313	70158	371	70174	418	70190	500	70206	580	70222	641	70238	713	70254	763	70270	886	70286	941
700	70095	203	70111	237	70127	264	70143	320	70159	379	70175	434	70191	505	70207	587	70223	655	70239	750	70255	779	70271	904	70287	970
750	70096	205	70112	244	70128	269	70144	323	70160	383	70176	449	70192	508	70208	592	70224	669	70240	772	70256	795	70272	914	70288	981
800	70097	206	70113	257	70129	268	70145	325	70161	385	70177	452	70193	511	70209	595	70225	689	70241	793	70257	820	70273	917	70290	983
850	71021	242	70944	289	70389	305	70352	382	70933	445	71161	518	71162	577	71164	653	71165	768	71167	852	71169	927	71171	1032	71173	1108
900	70805	252	71149	299	70392	317	70488	398	70291	464	71086	541	70587	602	71183	682	71186	797	71189	884	71192	962	71195	1069	71198	1148
950	71177	262	71178	308	70505	329	70487	414	71179	484	71155	563	71180	628	71184	710	71187	826	71190	917	71193	997	71196	1107	71199	1189
1000	70795	270	70752	318	70533	341	70379	431	70303	503	70423	584	71182	653	71185	739	71188	856	71191	949	71194	1033	71197	1145	71200	1231

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Seeflex 020E

Lightweight & flexible, ideal for weighscale applications



- Transparent, light weight Seeflex media, specifically designed for load and weigh scale type equipment
- Also very good in applications with vertical movement as it is particularly flexible

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.35mm / 1/64 inch
Operating Temp Range	-25 to 80°C / -13 to 176°F (surge to 100°C to 212°F)
Surface Resistivity (Ohms)	10 ¹⁰

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	6,000mm
Available with SS Rings?	On request only
Available with Plastic Rings?	On request only
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION

OSCILLATION

COMPRESSION

DUST TIGHT

FOOD SAFETY

ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	22155	87	22598	97	22610	100	22615	116	22360	133	21680	152	22622	169	22244	206	22646	227	22156	257	22672	266	22243	322	22699	340
100	20789	91	23000	103	20790	106	20791	122	20792	140	20793	161	21360	179	21361	217	21362	239	21363	260	21364	279	21365	340	21366	358
150	20690	95	23001	104	21222	113	21432	127	21317	145	21787	167	22623	186	22548	232	22647	252	22659	262	22673	292	22686	352	22700	373
200	21849	98	23002	110	21438	121	20692	133	20693	153	20694	175	21207	196	20695	238	20696	265	20697	275	20698	307	20699	370	20703	392
250	22425	112	22599	131	21781	137	21997	163	21613	190	21398	214	22624	248	22635	291	22648	336	22660	352	22674	394	22687	463	22701	491
300	21922	121	22342	145	21195	147	21837	176	21194	205	21384	235	22349	268	22636	316	22649	361	22661	378	22675	424	22688	501	22702	532
350	22590	126	22600	155	21882	158	21838	179	21774	239	21408	241	22625	278	22637	347	22650	368	22662	404	22676	431	22689	527	22703	579
400	22491	128	22601	160	21415	158	21308	179	21307	242	21784	242	22626	286	21806	335	22651	388	22063	406	22677	454	22690	529	22704	581
450	22591	140	22602	175	22492	172	22616	206	22316	252	22620	278	22627	307	22638	373	22652	413	22663	450	22678	484	22691	578	22705	617
500	23004	147	22603	177	22216	181	21303	217	21726	282	21915	293	22628	312	22639	393	22653	436	22664	474	22679	509	22692	608	22706	650
550	22592	158	22604	182	22611	187	21321	235	22445	289	21827	306	22629	328	22640	431	21913	488	22665	521	22680	562	22693	668	22707	711
600	22593	162	22605	184	21941	188	22040	236	22499	299	22621	311	22630	339	22641	463	22654	518	22666	559	22681	605	22694	712	22708	748
650	22594	166	22606	189	21369	200	22336	256	22618	300	21591	333	22631	351	22642	466	22655	521	22667	563	22682	610	22695	715	22709	765
700	22595	167	22607	190	22612	211	22104	267	22619	313	21636	334	22632	368	22643	468	22656	523	22668	569	22683	613	22696	718	22710	768
750	22596	169	22608	201	22613	213	22617	269	22150	314	21624	338	22633	401	22644	479	22657	551	22669	574	22684	646	22697	748	22711	793
800	22597	170	22609	215	22614	214	21714	270	22142	316	21189	355	22634	401	22645	484	22658	561	22670	577	22685	667	22698	751	22712	794
850	29178	203	41568	226	29459	254	24342	300	22315	350	23059	403	24837	410	24839	512	41573	603	26658	626	41581	730	41585	785	41588	844
900	41566	212	41569	236	22077	265	23154	314	23167	363	23168	419	24838	431	24840	538	41574	628	41578	656	41582	761	41586	818	41589	879
950	41567	222	41570	246	24767	277	22034	328	21699	377	40701	435	41571	453	24841	562	41575	653	41579	686	41583	791	41587	850	41590	914
1000	27031	230	26569	255	40148	289	21448	341	21631	391	21592	450	41572	475	41577	586	41576	678	41580	716	41584	821	22058	883	41591	949

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Seeflex 060ES

Superior strength for over-pressure situations



- Pressure-resistant Seeflex 060ES is a semi-transparent connector with an internal polyester scrim
- The internally bonded scrim restricts the Seeflex sleeve from stretching
- For over-pressure situations for continuous pressure up to 1.7 bar

PHYSICAL PROPERTIES:

Material	Seeflex - Ether-based thermoplastic polyurethane alloy with internally bonded polyester scrim
Wall Thickness (±10%)	1.3mm / 1/16 inch
Operating Temp Range:	-25 - 120°C / -13 - 248°F (surge to 140°C / 284°F)

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Longer lengths only

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	30763	164	30764	179	30856	197	30869	221	30929	250	30779	286	30780	313	30912	352	30930	382	31109	394	31121	425	31136	487	31151	515
100	30782	164	30806	179	30776	197	30760	221	30748	250	30731	286	30739	313	30836	352	30767	382	30827	394	30837	425	30925	487	31029	515
150	30773	173	30753	189	30746	208	30761	235	30762	266	30769	304	30727	332	30730	374	30790	407	30891	421	30832	454	31137	518	30890	550
200	30788	182	30908	200	30726	219	30729	248	30740	282	30771	322	30766	353	30770	397	30768	432	30732	449	30797	484	30794	550	30755	583
250	30887	190	31045	210	30777	230	30778	262	30818	299	30723	340	30867	374	30781	420	30951	457	30972	476	31122	514	30858	582	31152	618
300	30789	200	30988	220	30803	241	30831	275	30785	314	30819	357	30826	395	30888	442	31096	482	30855	503	30962	543	31138	614	31153	652
350	30933	209	31046	230	31057	253	30843	289	30821	330	30889	376	30913	415	30986	465	31097	507	30859	530	31123	572	30866	646	31154	686
400	30934	217	31047	240	31058	264	30845	302	31065	346	30744	394	30765	436	31086	488	31098	532	31110	558	31124	602	31139	677	31155	720
450	30935	226	30970	251	30917	275	30943	316	30820	362	31073	412	30846	457	30939	511	31099	557	30896	585	31125	632	31140	710	31156	755
500	31038	236	31048	261	31012	287	30942	329	30754	378	30931	430	31079	477	31087	533	31100	583	31111	613	31126	662	31141	742	31157	789
550	30857	244	31049	272	30906	298	31060	343	30863	394	30798	448	30904	498	30745	556	31101	608	31112	640	31127	691	31142	773	31158	823
600	30851	253	30910	281	30997	310	30811	356	30828	410	30796	466	30886	518	31088	579	30737	633	31113	667	31128	720	31143	806	31159	857
650	31039	262	31050	292	30918	320	30909	369	31066	425	31074	484	30847	539	31089	602	31102	658	31114	695	31129	751	31144	837	31160	892
700	31040	272	31051	302	30919	332	31061	383	31067	441	31075	502	31080	559	31090	625	31103	683	31115	722	31130	779	31145	869	31161	925
750	31041	280	31052	313	31059	343	31062	396	31068	457	31076	520	31081	580	31091	647	31104	709	31116	751	31131	809	31146	901	31162	960
800	31042	289	31053	322	30860	355	30873	410	31069	473	30932	539	31082	601	31092	670	31105	733	31117	778	31132	839	31147	934	31163	994
850	30861	298	31054	332	30959	366	31063	424	31070	490	31077	556	31083	621	31093	692	31106	758	31118	805	31133	868	31148	965	31164	1028
900	31043	307	31055	343	30981	377	30998	437	31071	505	30905	574	31084	643	31094	716	31107	784	31119	832	31134	898	31149	997	31165	1062
950	31044	316	31056	353	30944	388	31064	451	31072	521	31078	593	31085	663	31095	739	31108	809	31120	859	31135	928	31150	1030	31166	1097
1000	31030	325	31032	363	30772	400	30795	464	30877	538	30949	610	31033	683	31034	761	31035	834	31036	887	31037	957	31028	1061	31027	1130

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

TR (Tool Release)

As an added safety option, all BFM[®] fitting connectors are available in a TR (Tool Release) version which have a firmer snap-band that is virtually impossible to remove by hand. To calculate the price of a TR version of a connector, **simply add the following to the RRP of the standard connector price (based on the Diameter):**

Maximum possible diameter for TR is Ø650mm


DIA:	Ø100mm	Ø125mm	Ø150mm	Ø200mm	Ø250mm	Ø300mm	Ø350mm	Ø400mm	Ø450mm	Ø500mm	Ø550mm	Ø600mm	Ø650mm
	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:
Surcharge on standard Connector	15	15	17	21	22	25	28	31	61	62	66	69	73

Please Note: The TR version of a BFM[®] fitting connector has a different part number to the standard version.

TR (Tool Release) Tools

To remove the TR Connectors, a special BFM[®] 'TR Tool' is required. Our standard TR Tool option features a rounded end tool and only requires the spigot to have a 6mm hole drilled in the outer most ridge. The 'Smiley Face' tool has an additional level of safety as it is used with a specially shaped hole (see adjacent information).

	Part No:	RRP US\$:
Standard TR Tool	304990	53
Smiley Face TR Tool	304991	53



'Smiley Face' Hole Punch

For additional security, and to avoid staff improvising tools to remove connectors, our 'Smiley Face' Tool Release option is a popular choice. There is a special pneumatic 'punch tool' (shown right) that makes the custom-shaped holes. Spigots can be supplied with the holes pre-punched for a small additional charge. Contact your local distributor for more information.

	Part No:	RRP US\$:
Smiley Face Hole Punch	10402	P.O.A.



TR Lock-Out Safety System

Our Tool Release (TR) connector range is a popular way to add a layer of safety to applications where the connector is mounted very close to equipment that is rotating or spinning very fast, such as above rotary valves or rotary knives.

	Part No:	RRP US\$:
TR Lock-Out Safety Tube	305275	16



The prices shown above indicate our Recommended Retail Prices (RRP).

Quick Access Port

The Quick Access Port is a removable screw in plug that can be added to the wall of Seeflex 040E and Seeflex 060ES connectors to aid in-line testing/sampling (includes tapered versions).

For minimum 150mm diameter and 150mm length connectors.

	RRP US\$:
Surcharge on standard Connector RRP price	262



Rings

Applicable to: Seeflex 040E (including Wash Sleeves and Blanking Socks/Bins). Seeflex 040AS, LM3, LM4, Teflex and Teflex NP.

Anti-collapse rings can be added to help keep the connector walls open. This is particularly useful if operating under vacuum or for longer connectors where there may be the potential for the connector walls to be 'sucked' inwards. Rings are available in stainless steel (to Ø500mm) or plastic (to Ø1,650mm & max operating temperature of 110°C/230°F) and can be added to connectors at least 150mm (5") long if made from the materials listed above (subject maximum applicable diameters).

To calculate the price of a ringed version of a connector, simply add the following price per ring to the RRP of the standard connector price (based on the Diameter):

DIA:	Ø100	Ø125	Ø150	Ø200	Ø250	Ø300	Ø350	Ø400	Ø450	Ø500	Ø550	Ø600	Ø650	Ø700	Ø750	Ø800	Ø850	Ø900	Ø950	Ø1000
	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:	RRP US\$:
Stainless Steel Rings	55	58	65	77	80	84	95	102	109	116	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Plastic Rings	73	80	88	95	102	109	116	121	124	124	124	124	131	175	189	203	226	240	254	277

- The distance between spigot & rings is 75mm (3") for 150mm long connectors, and 100mm (4") for all others.
- Multiple rings need to be evenly spaced at a minimum of 100mm (4") apart for connectors up to 800mm long inclusive (maximum 4 rings) and 200mm (8") apart for connectors 850mm long and over (maximum 10 rings). Maximum length restrictions apply to certain materials. Refer to our 'Quick Ref Limitations Summary' document for more information.
- The diameter of the steel ring itself is 6mm (¼"), the plastic ring itself is 8mm (⅝") and the 'connector' that joins the plastic ring together is approx. 10mm (⅜").
- Ringed connectors have different part numbers to their standard equivalents.



The prices shown above indicate our Recommended Retail Prices (RRP).

Flexi / Flexi-Light

Lightweight connector with support coil - ideal for bag feeders & filling heads



- A lightweight Seeflex connector with an encased 316 stainless steel wire coil to support flex and compression
- Used for bag feeders, filling heads or bulk bag fillers.
- Flexi-Light features a slightly lighter material and wire coil

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane with a 316 stainless steel wire coil	
Wall Thickness (±10%):	FLEXi	0.60mm / 1/32 " (Ø100 – 200mm / 4 – 8") 0.70mm / 1/32 " (Ø250 – 300mm/10 – 12")
	FLEXI-LIGHT	0.4mm/ 1/64"
Wire Coil Diameter	FLEXi	2.6mm / 1/64 "
	FLEXI-LIGHT	1.6mm / 1/16 "
Operating Temp Range:	- 20 to 85°C / - 4 to 185°F	

Available Diameters:	100mm, 150mm, 200mm, 250mm, 300mm
Minimum Length:	200mm
Maximum Length:	6,000mm
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Subject to length & movement restrictions.

FLEXI:

DIA:	Ø100mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
200	25701	506	26152	523	22116	562	25910	692	21197	725
250	26905	516	26139	540	22190	587	26000	722	22938	761
300	26009	528	25871	552	21623	606	26825	748	21732	795
350	26233	538	25898	568	22136	630	26419	778	23104	826
400	25877	545	25615	581	23100	653	25789	806	21765	861
450	26156	557	25798	602	23101	674	25836	836	23099	896
500	26027	568	25899	610	23102	697	26415	863	60023	931
550	28884	580	25950	625	23103	719	25790	883	40277	968
600	25761	590	26640	641	23087	742	25791	902	22757	1004
650	29278	601	28090	656	23111	766	28503	935	25207	1037
700	26246	612	26252	672	24293	785	26430	968	25507	1071
750	28883	620	26033	687	24645	808	26371	1002	23105	1105
800	25592	632	26358	701	22392	831	25720	1034	22793	1142
850	29028	644	25593	715	24660	856	26904	1060	22804	1178
900	26525	650	25999	733	24818	878	25650	1083	22137	1213
950	26067	660	29970	751	26681	899	25668	1111	25671	1248
1000	25927	670	25928	768	24334	921	26581	1148	26866	1283

FLEXI - LIGHT:

DIA:	Ø100mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
200	28372	483	28279	503	28278	519	28869	627	29260	656
250	29479	493	28201	518	28200	540	29241	653	29736	688
300	40300	505	28262	532	28264	560	28261	678	28742	718
350	40301	518	29077	547	29194	581	29067	704	28744	750
400	29565	530	28934	562	28199	601	28877	729	28743	780
450	40302	543	28280	577	29259	621	28768	755	28500	811
500	28914	555	29157	591	29274	642	29193	780	29504	842
550	40303	563	40312	605	29569	662	40321	806	28918	873
600	28856	571	40313	620	29566	683	28494	831	29322	904
650	40304	580	40314	634	29328	703	40322	857	40258	935
700	40305	589	28281	649	40319	723	28941	882	40257	966
750	40306	597	40315	664	29060	743	40323	908	40267	997
800	40307	606	28552	678	29641	764	40324	933	40329	1028
850	40308	616	40316	692	40320	784	40325	958	29607	1059
900	40309	624	29547	707	40150	805	28481	983	40330	1089
950	40310	632	40317	722	29966	826	40326	1009	40331	1121
1000	40311	641	40318	736	29593	846	40327	1034	40332	1151

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector, please refer to the 'Add-ons' pages.

Flexi-Earthed

Flexi-connector with support coil & earthing terminal lugs



- A standard Flexi connector with built-in terminal earthing lugs attached to the ends of the wire coil.
- Terminal lugs are designed to be attached to earthing cables to provide maximum electrostatic safety.

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane with a 316 stainless steel wire coil & Ø5mm SS earthing lugs
Wall Thickness (±10%):	0.60mm / 1/32" (Ø100 – 200mm / 4 – 8") 0.70mm / 1/32" (Ø250 – 300mm/10 – 12")
Wire Coil Diameter	2.6mm / 1/64"
Operating Temp Range:	- 20 to 85°C / - 4 to 185°F

Available Diameters: 100mm, 150mm, 200mm, 250mm, 300mm

Minimum Length: 250mm

Maximum Length: 6,000mm


Available as TR (Tool Release) option? Yes

✓ VIBRATION	✓* OSCILLATION	✓ COMPRESSION	✓ DUST TIGHT	✓ 65+ 3 20+	✓ FDA FOOD SAFETY	✓ EX ATEX
----------------	-------------------	------------------	-----------------	----------------------	-------------------------	-----------------


* Subject to length and movement restrictions

FLEXI - EARTHED:

DIA:	Ø100mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
250	29256	567	28795	591	28360	638	28845	773	28432	811
300	28825	579	28826	603	28314	657	28412	798	28872	846
350	40363	588	40265	619	28741	680	28448	829	28875	877
400	29083	596	28472	632	28864	704	29017	857	28519	912
450	40766	608	29023	653	28345	725	28701	887	28471	947
500	29497	619	28849	662	28529	748	28491	914	28660	982
550	40298	631	29917	676	29665	770	29942	934	28963	1019
600	40360	641	29551	692	28833	793	28359	953	29321	1055
650	29627	652	40770	707	29196	817	40774	986	40778	1088
700	40767	663	29197	723	28848	836	28897	1019	40779	1122
750	40299	671	40771	738	28766	859	40755	1053	40780	1156
800	29967	683	29292	752	28185	882	29057	1085	40781	1193
850	40768	695	40772	766	28501	907	40775	1111	40782	1229
900	29074	701	29075	784	28957	929	40776	1134	29390	1264
950	40769	711	29577	802	40400	950	40777	1162	40783	1299
1000	29289	721	40773	819	28765	971	28730	1199	28775	1334

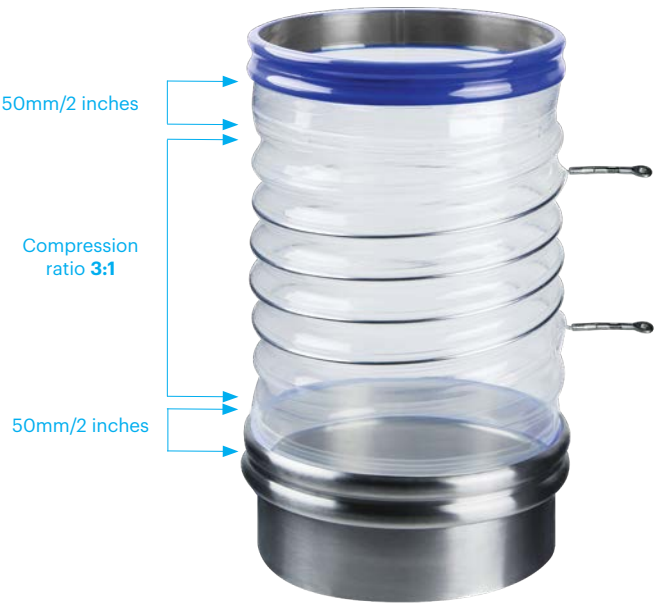

Flexi-Earthed Terminal Lugs:

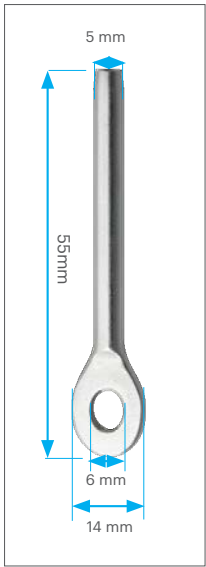

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector, please refer to the 'Add-ons' pages.

Teflex Woven

100% woven Polyester - suitable for higher temperatures



- Capable of running at high temperatures – continuously operating at 260°C / 500°F with short term surges at 280°C / 536°F.
- Can be used on products across the full pH scale, i.e. either caustic or acid products will not effect Teflex Woven.

PHYSICAL PROPERTIES:

Material	Woven PTFE	
Weight (±10%)	678g/m² / 20oz/yd²	
Operating Temp Range	-40 - 260°C / -40 - 500°F (surge to 280°C / 536°F)	
Air Permeability	(cm³/cm²/sec@125Pa)	(ft³/ft²/min@0.5" wg)
	0.3	0.5

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	1,500mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?*	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

*to Max. Operating Temp of 110°C / 230° F

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	30465	293	40909	315	26659	419	30443	590	25395	670	30308	752	25284	779	30488	806	31280	878	26304	973	31281	1073	31282	1485	31283	1610
100	30079	293	30080	315	30081	419	21507	590	30065	670	21534	752	21470	779	30082	806	30083	878	30084	973	30085	1073	21535	1485	30086	1610
150	30001	326	30056	394	21537	463	21939	593	30063	698	21928	813	21505	860	21637	1004	21926	1130	30311	1259	30312	1363	21927	1601	30310	1826
200	30096	349	30638	417	30061	484	21439	597	30057	705	20558	843	21506	923	20557	1075	20556	1130	30058	1259	30059	1363	21577	1601	30060	1826
250	30186	439	40235	503	21986	569	21341	713	21473	860	21475	1011	21471	1139	21472	1294	21492	1441	21474	1597	24847	1752	26300	1883	27083	2036
300	30107	484	30804	557	30103	631	21343	791	30210	954	21339	1122	21957	1267	22898	1438	21166	1602	30101	1774	26051	1947	26052	2093	30160	2264
350	28881	528	40910	611	30209	692	21527	870	30211	1047	30212	1232	21528	1394	24748	1583	24991	1762	21686	1952	41082	2141	40393	2304	30155	2492
400	40895	572	40911	665	30176	754	22357	948	21558	1141	30280	1343	25171	1522	24749	1727	21627	1923	30223	2129	30224	2335	41103	2515	22011	2720
450	30325	617	40912	719	26204	816	22483	1027	24711	1234	30259	1453	29047	1649	21337	1870	21600	2083	29923	2306	41083	2530	28034	2725	28032	2948
500	30605	662	40913	774	30392	877	30273	1105	23150	1328	30366	1564	40976	1776	24297	2015	41013	2244	30196	2484	41084	2724	28035	2935	41119	3176

All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Teflex NP Black

PTFE laminate for temperature & chemical extremes



- Non-permeable PTFE laminate that can be used on products across the full pH scale, ie. caustic or acid products will not effect Teflex NP Black
- Capable of running at high and low temperatures
- Very good at dissipating electrical charge - 10⁶ Ω

PHYSICAL PROPERTIES:

Material	Pure PTFE
Weight (±10%)	459g/m ² / 13.5oz/yd ²
Operating Temp Range	-73 - 300°C / -99 - 572°F (surge to 316°C / 600°F)
Surface Resistivity (Ohms)	10 ⁶

Maximum Diameter:	500mm
Maximum Length:	1,000mm
Available with SS Rings?	Yes
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Expect shorter life-span if used # All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	41175	264	41176	284	29938	355	29859	471	29858	558	29631	632	41296	701	29820	725	41297	791	41313	876
100	40873	264	41060	284	29093	355	29041	471	29043	558	29042	632	29787	701	29531	725	29532	791	29816	876
150	41042	293	41061	355	29106	388	29124	486	29133	576	29087	649	29788	775	29506	903	41298	1017	29844	1134
200	41043	314	41062	375	29108	406	28819	495	29135	587	28718	683	29552	830	29501	967	29510	1017	40152	1134
250	41044	395	41063	452	29127	475	29071	667	29137	788	29147	890	29927	1025	29489	1164	29760	1297	41314	1437
300	41045	436	41064	502	29129	527	29078	703	29144	829	29080	977	29763	1141	29845	1295	41299	1441	41295	1597
350	41046	475	41065	551	41179	623	29629	782	41253	943	29800	1109	29910	1255	41282	1424	41300	1586	29924	1756
400	41047	515	41066	599	29601	679	29757	854	29936	1027	40657	1208	40764	1370	41283	1553	41301	1730	29925	1916
450	41048	556	41067	647	29602	733	29535	924	40188	1111	40658	1309	40765	1484	29511	1684	40337	1875	29926	2076
500	41049	595	41068	697	40174	790	29852	994	29630	1195	29930	1408	41271	1599	29513	1814	41302	2019	41315	2236
550	41050	635	41069	745	41180	845	41247	1066	29937	1280	41261	1507	41272	1714	41284	1943	41303	2164	41316	2395
600	41051	676	41070	794	41181	899	40269	1135	40232	1363	41262	1607	41273	1828	41285	2074	41304	2308	41317	2555
650	41052	716	41071	844	41241	955	41248	1206	41254	1448	41263	1706	41274	1942	41286	2204	41305	2452	41318	2716
700	41053	756	41072	892	41242	1010	41249	1277	41255	1532	41264	1805	41276	2057	41287	2333	41306	2596	41319	2875
750	41054	796	41073	941	41243	1066	41250	1347	41256	1616	41265	1905	41277	2171	41288	2464	41307	2741	41320	3035
800	41055	836	41074	990	40355	1121	40872	1418	41257	1701	41266	2005	41278	2286	41289	2593	41308	2885	41321	3194
850	41056	877	41075	1039	41244	1176	41251	1487	41258	1785	41267	2104	41279	2401	41290	2723	41309	3029	41322	3355
900	41057	917	41076	1087	41245	1231	40663	1559	41259	1868	41268	2204	41280	2516	41291	2853	41310	3174	41323	3514
950	41058	956	41077	1136	41246	1286	41252	1629	41260	1954	41269	2303	41281	2630	41292	2983	41311	3318	41324	3674
1000	41059	997	41078	1185	29972	1342	40346	1699	40133	2038	40343	2403	41293	2744	41294	3112	41312	3463	41325	3833



The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

Teflex NP Opaque

Semi-transparent PTFE laminate for temperature & chemical extremes



- Non-permeable PTFE laminate that can be used on products across the full pH scale, ie. caustic or acid products will not effect Teflex NP Opaque
- Capable of running at high and low temperatures
- Semi-transparent to allow product-flow visibility

PHYSICAL PROPERTIES:

Material	Pure PTFE
Weight (±10%)	459g/m² / 13.5oz/yd²
Operating Temp Range	-73 - 300°C / -99 - 572°F (surge to 316°C / 600°F)
Surface Resistivity (Ohms)	Insulative

Maximum Diameter:	500mm
Maximum Length:	1,000mm
Available with SS Rings?	Yes
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Expect shorter life-span if used # All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	41177	264	41178	284	29900	355	40250	471	41356	558	40247	632	40252	701	41396	725	41412	791	40749	876
100	41137	264	41156	284	40649	355	29934	471	29687	558	40256	632	40248	701	40630	725	41413	791	40251	876
150	41138	293	41157	355	29861	388	29933	486	29943	576	40246	649	41381	775	40661	903	41414	1017	41430	1134
200	41139	314	41158	375	40249	406	29905	495	40270	587	29751	683	40245	830	40852	967	29963	1017	41431	1134
250	41140	395	41159	452	40639	475	29866	667	41357	788	29850	890	41009	1025	41397	1164	29907	1297	40638	1437
300	41141	436	41160	502	29929	527	29847	703	29848	829	29849	977	29906	1141	29846	1295	41415	1441	41432	1597
350	41142	475	41161	551	41328	623	41343	782	41007	943	41008	1109	41382	1255	41398	1424	41416	1586	41433	1756
400	41143	515	41162	599	29904	679	40746	854	41358	1027	40832	1208	41383	1370	41399	1553	41417	1730	41434	1916
450	41144	556	41163	647	41329	733	41344	924	41359	1111	41370	1309	41384	1484	41400	1684	41418	1875	41435	2076
500	41145	595	41164	697	41330	790	40874	994	41360	1195	41371	1408	41385	1599	41401	1814	41419	2019	41436	2236
550	41146	635	41165	745	41331	845	41345	1066	41361	1280	41372	1507	41386	1714	41402	1943	41420	2164	41437	2395
600	41147	676	41166	794	41332	899	41346	1135	41362	1363	40888	1607	41387	1828	41403	2074	41421	2308	41438	2555
650	41148	716	41167	844	41333	955	41347	1206	41363	1448	41373	1706	41388	1942	41404	2204	41422	2452	41439	2716
700	41149	756	41168	892	41334	1010	41348	1277	41364	1532	41374	1805	41389	2057	41405	2333	41423	2596	41440	2875
750	41150	796	41169	941	41335	1066	41349	1347	41365	1616	41375	1905	41390	2171	41406	2464	41424	2741	41441	3035
800	41151	836	41170	990	41336	1121	40875	1418	41366	1701	41376	2005	41391	2286	41407	2593	41425	2885	41442	3194
850	41152	877	41171	1039	41337	1176	41352	1487	41367	1785	41377	2104	41392	2401	41408	2723	41426	3029	41443	3355
900	41153	917	41172	1087	41338	1231	41353	1559	41368	1868	41378	2204	41393	2516	41409	2853	41427	3174	41444	3514
950	41154	956	41173	1136	41339	1286	41354	1629	41369	1954	41379	2303	41394	2630	41410	2983	41428	3318	41445	3674
1000	41155	997	41174	1185	41342	1342	41355	1699	40351	2038	41380	2403	41395	2744	41411	3112	41429	3463	41446	3833

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

LM3

100% Woven polypropylene - breathable & suitable for low temperatures



- Ideal for low temperature environments (down to -70°C/-94°F)
- Perfect for food processing, especially when some breathability is required to alleviate pressure.

PHYSICAL PROPERTIES:

Material	100% woven polypropylene	
Weight (±10%)	295g/m ² / 8.7oz/yd ²	
Operating Temp. Range	-70 to 94°C / -94 to 201°F (surge to 107°C / 225°F)	
Air Permeability	(cm ³ /cm ² /sec@125Pa)	(ft ³ /ft ² /min@0.5" wg)
	13	25

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	1,500mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings
Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	50671	79	51087	82	50768	86	50670	97	50709	106	50623	111	51206	127	51227	136	51248	151	51274	174	51298	187	51327	198	51355	209
100	50602	79	50522	82	50539	86	50520	97	50540	106	50541	111	50542	127	50543	136	50544	151	50603	174	50647	187	51328	198	50707	209
150	50628	80	50672	83	50521	87	50546	97	50665	106	50622	117	51207	128	50669	137	51619	151	50604	176	51299	188	50777	200	51356	212
200	50701	92	51088	95	25277	100	50519	100	50532	109	50552	123	50715	131	50553	146	50783	158	50605	181	51300	194	51329	206	51357	219
250	50710	95	51089	100	50594	104	50626	118	50627	133	50625	143	50789	159	50711	184	51249	203	50780	226	51301	274	51330	287	51358	300
300	30751	100	50751	103	26870	109	26871	124	25275	139	50644	150	50645	166	51476	191	51250	212	50613	235	51302	281	51331	295	51479	310
350	51066	103	51090	108	51139	114	50641	129	25276	145	50723	157	50747	173	51753	199	51251	220	51275	242	51303	289	51332	304	51360	319
400	51067	107	50750	113	50722	118	50759	134	50754	150	25296	163	50767	180	51228	206	51252	227	26701	252	51304	298	51333	314	51361	329
450	50525	111	50752	116	50535	123	50736	140	50746	156	26837	170	51057	187	26838	214	51253	236	51276	261	51305	305	50656	322	51362	338
500	50526	115	51091	121	50634	128	50635	144	26921	162	26923	176	51208	194	51754	222	51254	243	51277	269	51306	314	51334	331	51363	348
550	51068	118	51092	126	51140	133	51154	149	51171	167	51188	184	51209	201	51229	229	51255	251	51278	278	51307	322	51335	340	51364	358
600	51138	122	51093	130	50776	137	50774	155	50708	173	50652	190	50787	209	51230	237	51256	259	51279	287	51308	330	51336	349	51365	367
650	51069	127	51094	134	51141	143	51155	160	51172	179	51189	197	51210	215	51231	244	51257	266	51280	295	51309	338	51337	357	51366	377
700	51070	130	51095	139	51142	148	50779	166	51173	185	51190	203	51211	223	51232	252	51258	275	51281	304	51310	347	51338	367	51367	386
750	51071	134	51096	143	51143	153	51156	171	51174	190	51191	210	51212	230	50705	260	50706	282	51282	313	51311	355	51339	375	51368	396
800	51072	137	51097	148	51755	158	50775	175	50712	197	51192	216	51213	237	51233	267	51259	290	51283	322	51312	363	51340	385	51369	406
850	51073	142	51098	152	51144	162	51157	181	51175	202	51193	223	51214	244	51234	275	51260	299	51284	331	51313	371	51341	393	51370	415
900	51074	146	51099	157	51145	167	51158	186	51176	208	51194	229	51752	251	51235	281	51261	306	51285	340	51314	379	51342	401	51371	425
950	51075	149	51100	161	51146	172	51159	191	51177	214	51195	236	51215	259	51236	290	51262	314	51286	348	51315	388	51343	411	51372	435
1000	51076	153	51101	166	51487	176	51160	197	26922	219	50655	242	51216	266	51237	297	51263	322	51287	357	51316	395	51344	419	51373	445

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

LM4

100% woven Polyester - suitable for higher temperatures



- Used for higher temperature environments (up to 130°C / 266°F).
- Ideal for use where air needs to be vented through the walls of the flexible connector.

PHYSICAL PROPERTIES:

Material	100% woven polyester fibre	
Weight (±10%)	393g/m² / 11.6oz/yd²	
Operating Temp Range	-55 - 130°C / -48 - 266°F (surge to 150°C / 302°F)	
Air Permeability	(cm³/cm²/sec@125Pa)	(ft³/ft²/min@0.5" wg)
	0.4	0.8

Maximum Diameter:	1,650mm
Maximum Length (≤ Ø650mm):	1,500mm
Available with SS Rings?	Yes (≤ Ø500mm)
Available with Plastic Rings?*	Yes
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)
*to Max. Operating Temp of 110°C / 230° F	

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	3-A 60-64 Sanitary Fittings	FOOD SAFETY	FOOD SAFETY	ATEX

#All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	26101	79	41664	82	50506	87	26344	97	50507	106	26239	111	29840	127	26262	136	21453	151	26305	174	41665	187	41666	198	41667	209
100	20900	79	51000	82	20901	87	20902	97	20903	106	20904	111	20905	127	20906	136	20907	151	20908	174	20909	187	20910	198	20911	209
150	20509	80	51001	83	19569	86	50009	97	50014	106	50015	117	50406	128	22089	137	50424	151	50425	176	50426	188	50427	200	50428	212
200	20912	92	51002	95	21847	100	19399	100	20510	109	20511	123	20512	131	20483	146	20513	158	20514	181	20515	194	20516	206	20517	219
250	25238	95	50140	100	21987	104	21477	118	21614	133	21812	143	22897	159	21622	184	22927	203	26531	226	40791	274	24391	287	28822	300
300	20914	100	50137	103	20915	109	20916	124	21924	139	20918	150	20919	166	20920	191	20921	212	20922	235	20923	281	20924	295	20925	310
350	25595	103	23146	108	21883	114	22367	129	50004	145	22852	157	20314	173	26532	199	50523	220	26533	242	29965	289	41226	304	41233	319
400	20926	107	28689	113	20927	118	20928	134	20929	150	20650	163	20931	180	20932	206	20933	227	20934	252	20935	298	20936	314	20937	329
450	26254	111	29187	116	22366	123	22800	140	50404	156	50405	170	50407	187	50499	214	29589	236	28349	261	50501	305	26567	322	24486	338
500	22758	115	23206	121	20939	128	22208	144	20941	162	20942	176	20943	194	24296	222	20945	243	25410	269	20947	314	20948	331	20949	348
550	26381	118	41192	126	28688	133	26243	149	41201	167	29564	184	24809	201	41207	229	41209	251	41213	278	41219	322	41227	340	41234	358
600	20956	122	28431	130	20957	137	20958	155	20959	173	20960	190	20961	209	20962	237	20963	259	20964	287	20965	330	20966	349	20967	367
650	26141	127	41193	134	26087	143	25862	160	28716	179	23017	197	41206	215	22376	244	41210	266	41214	295	41220	338	41228	357	23199	377
700	41188	130	41194	139	50013	148	22132	166	22131	185	25669	203	23228	223	41208	252	29585	275	21355	304	41221	347	41229	367	41235	386
750	26346	134	50619	143	41197	153	24951	171	23051	190	22965	210	40237	230	25642	260	24955	282	21754	313	41222	355	41230	375	41236	396
800	20968	137	25560	148	50673	158	20970	175	20971	197	21903	216	20973	237	20974	267	20975	290	41215	322	20977	363	20978	385	20979	406
850	41189	142	25561	152	41198	162	22163	181	41202	202	41204	223	24833	244	24835	275	25111	299	41216	331	41223	371	41231	393	41237	415
900	41190	146	41195	157	41199	167	22162	186	24283	208	21901	229	24834	251	22395	281	41211	306	41217	340	41224	379	22982	401	41238	425
950	41191	149	41196	161	41200	172	25966	191	41203	214	41205	236	40111	259	24836	290	41212	314	41218	348	41225	388	41232	411	41239	435
1000	20980	153	25607	166	20981	176	21878	197	20983	219	20985	242	26215	266	20986	297	20987	322	20988	357	20989	395	20990	419	20991	445

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of a connector or to add Rings, please refer to the 'Add-ons' pages.

FM1 Breather

Woven polyester breather bag for venting contained vessels



- Designed for breathing applications such as venting hoppers and other contained vessels
- The BFM® breather may become required as the BFM® connectors create a 100% sealed system.

PHYSICAL PROPERTIES:

Material	100% woven polyester needlefelt	
Weight (±10%)	550g/m² / 16.22oz/yd²	
Operating Temp Range	-20 - 130 °C / -4 - 266 °F (surge to 150 °C / 302 °F)	
Air Permeability	(cm³/cm²/sec@125Pa)	(ft³/ft²/min@0.5" wg)
	17	33

Maximum Diameter:	650mm
Maximum Length (≤ Ø650mm):	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No
Available as TR (Tool Release) option?	Yes

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

All BFM® fitting connectors comply with 3-A 60-64 Sanitary Fittings

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
100	30544	104	30711	109	30553	112	30562	116	30546	122	30612	133	30807	137	31234	179	30608	209	30654	260	31421	319	31422	338	31424	358
150	30534	104	30668	109	30566	113	30590	117	30716	122	30635	133	30632	138	31235	181	30669	209	31254	263	31426	325	31441	342	31455	362
200	30528	104	30533	109	30569	113	30530	118	30602	123	30629	133	30630	140	30572	183	30689	210	31255	266	31427	329	31167	347	31456	367
250	30540	104	30576	109	30586	115	30601	122	30588	125	30607	133	31229	141	31236	188	31243	211	30805	268	31428	333	31442	352	31457	373
300	30517	106	30525	110	30258	116	30334	123	30545	125	30615	133	30631	143	30604	194	31244	211	30532	269	31429	338	31443	356	31458	377
350	30661	111	30625	112	30600	116	30535	124	30624	129	30637	134	31207	144	31237	196	31245	212	31256	276	31430	343	31444	361	31459	382
400	30589	113	30702	114	30542	117	30567	124	30537	130	30551	134	31022	145	31238	198	30955	212	31201	282	31431	347	31445	365	31460	387
450	30568	114	30666	122	30585	130	30656	137	30791	154	31206	160	31004	168	31239	210	30593	217	31257	290	31432	352	31446	370	31461	392
500	30515	128	30640	131	30548	135	30539	137	30513	154	30557	163	30667	173	30559	215	30598	226	30597	296	31433	356	31447	374	31462	397
550	31200	129	31214	134	30616	139	30606	148	30963	154	30937	164	31230	173	30704	224	31246	227	30623	302	31434	361	31448	379	31463	402
600	30571	130	30854	139	30583	139	30580	148	30541	155	30717	164	30985	173	31240	225	31247	227	30840	307	31435	366	30543	383	31464	407
650	30718	130	31215	139	30610	139	30662	148	30783	155	30619	166	31231	173	31241	226	31248	228	31258	311	31436	370	31449	388	31465	412
700	32190	133	31216	139	30878	139	30688	159	30660	159	30646	167	30956	175	31242	227	32110	229	30671	314	30577	375	31450	393	31466	417
750	30757	140	31217	140	30621	140	30645	159	30524	159	30676	169	31232	179	30850	227	31249	240	31259	318	30574	380	31451	398	31467	422
800	30613	140	31218	140	30614	140	30563	160	30633	161	30558	169	30971	181	30560	230	31250	251	31260	322	31437	385	30651	402	31468	427
850	31210	143	31219	161	30611	161	31222	167	31224	168	31227	184	31182	196	31183	237	31251	262	31261	326	31438	389	31452	407	31469	432
900	31211	147	31220	163	30581	181	30659	182	31225	184	32116	197	31181	208	30808	241	32109	274	31262	329	31439	394	31453	412	31470	437
950	31212	150	31221	166	31180	181	31223	183	31226	185	31228	198	31233	209	31190	248	31252	284	31263	332	31440	400	31454	416	31296	440
1000	32091	153	30674	167	30675	181	30617	184	30564	186	30626	199	30591	209	30677	253	31253	293	30650	335	30516	404	31423	420	31289	444

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a TR version of an FM1 Breather Bag, please refer to the 'Add-ons' page 6.

Blanking Cap (Seeflex 040E)

Prevents contamination/used as sight-glasses



- Used to prevent contamination during clean down or change-over.
- They protect products and prevent dust emission into the factory.
- Ideal as sight-glasses for sifters, and other equipment.

PHYSICAL PROPERTIES:

Material	Ether-based thermoplastic polyurethane alloy
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Height (Length)	30mm (1 3/16")

Maximum Diameter: 1,650mm
Available as TR (Tool Release) option? Yes (≤ 650mm)

✓

VIBRATION

✓

OSCILLATION

✗

COMPRESSION

✓

DUST TIGHT

✓

FOOD SAFETY

✓

ATEX

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
	20750	90	20761	94	20751	97	20752	104	20709	113	20753	128	20754	149	20755	176	20756	189	20757	229	20758	284

DIA:	Ø600mm		Ø650mm		Ø700mm		Ø750mm		Ø800mm		Ø850mm		Ø900mm		Ø950mm		Ø1,000mm		Ø1,050mm		Ø1,100mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
	20759	307	20760	322	21865	557	22868	568	21476	572	25086	581	22359	601	60013	620	21866	751	24667	807	21867	823

DIA:	Ø1,150mm		Ø1,200mm		Ø1,250mm		Ø1,300mm		Ø1,350mm		Ø1,400mm		Ø1,450mm		Ø1,500mm		Ø1,550mm		Ø1,600mm		Ø1,650mm	
	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
	22382	880	25197	917	22345	962	29391	1027	26468	1074	40402	1120	24668	1165	24576	1320	40403	1373	26743	1426	28202	1486



The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a Tool Release version of a Blanking Cap, please refer to the 'Add-ons' page 6.

Blanking Bin (Seeflex 040E)

Ideal for sifter oversize collection bins



- Used for collecting overs/reject product on sifters/sieves etc.
- Can be lined with plastic bags for easy disposal of reject product.
- Allows for visibility of product full level and reject consistency.

PHYSICAL PROPERTIES:

Material	Seeflex ether-based thermoplastic polyurethane
Wall Thickness (±10%)	0.9mm / 1/32 inch
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings:	Yes (≤ Ø500mm)
Available with Plastic Rings:	No
Available as TR (Tool Release) option?	Yes (≤ Ø650mm)

VIBRATION

OSCILLATION

COMPRESSION

DUST TIGHT

FOOD SAFETY

ATEX

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
100	25117	144	29059	154	22733	169	24323	176	22732	194	24437	224	25868	238	26258	306	27033	347	26129	401	29568	442	27032	486	40397	529
150	22851	148	21852	159	25630	174	21709	184	28216	203	21589	236	26194	252	28011	320	24451	363	40474	419	40487	461	40504	506	40521	551
200	21576	151	23022	163	22744	179	24360	192	25350	214	22546	248	26193	266	26709	335	40461	379	29222	436	25870	480	40505	527	40522	572
250	24779	154	22352	167	21309	184	25379	200	24450	224	23039	260	28226	280	40444	350	40462	395	40476	453	40489	500	40506	546	40523	595
300	21967	157	22161	172	21458	189	22878	207	26319	235	25869	272	25842	295	27125	365	50510	411	26624	471	40490	518	40507	567	40524	617
350	21170	160	21804	175	24774	194	60020	215	26176	245	40434	285	25843	310	40445	379	40464	427	40477	488	40491	538	40508	587	40525	638
400	21520	163	22353	179	24638	199	21171	223	23207	254	28530	296	25241	325	29004	394	21908	442	24531	506	40492	557	40509	608	40526	661
450	22946	167	26467	184	22742	204	22231	230	26454	265	22042	308	26200	339	24464	408	28942	458	40479	524	40493	576	40510	629	40527	683
500	22716	170	22212	188	22528	210	21791	239	22885	275	25199	320	25844	353	24938	423	26334	475	28874	541	40494	595	40511	649	40528	705
550	22717	173	40423	192	24755	215	26598	247	27052	286	26950	332	40438	368	40455	437	40467	490	40480	558	40495	614	40512	670	40529	727
600	60012	176	24563	197	24306	220	22088	254	22530	295	22087	344	22487	382	24939	451	40468	506	28332	576	40496	633	40513	690	40530	749
650	26789	180	26798	200	24777	225	24456	262	40432	306	28702	356	40439	397	26337	466	40469	523	40481	593	40497	652	40514	710	40531	771
700	40415	183	26478	204	60017	230	22760	269	25210	316	28068	368	24727	412	25388	480	40470	539	40482	610	40498	671	40515	731	40532	793
750	27126	186	40427	209	25327	235	28514	278	21719	327	28151	380	40440	426	40457	494	24970	554	28072	628	40499	691	40516	752	40533	815
800	25425	189	29198	213	22759	240	22787	286	23156	337	24346	392	26540	440	25394	509	40472	570	40483	646	40500	710	40517	772	40534	837
850	25753	193	40428	217	29600	246	22756	293	29039	347	40435	404	40441	455	24776	524	40473	586	40484	663	40501	729	40518	793	40535	859
900	40417	196	40429	222	25663	250	26014	301	26013	357	25692	416	25780	470	40459	539	25186	602	40485	680	40502	748	40519	812	40536	881
950	40418	199	40430	226	29250	255	28446	309	24794	367	25727	428	40443	484	40460	553	29674	618	40486	698	40503	767	40520	833	40537	904
1000	60026	202	29038	230	60027	261	60028	317	25892	378	25057	440	40385	499	40389	568	28772	634	40391	715	40398	786	40406	854	40407	925

The prices shown above indicate our Recommended Retail Prices (RRP). To calculate the cost of a Tool Release version or to add Rings, please refer to the 'Add-ons' page 6.

Kevlar Cover

Flame resistant cover to reduce the risk of consequential fires



- Typically used in over pressure and potentially explosive applications.
- Designed to fit over existing connectors and tightened onto the BFM® spigot using butterfly clamps.

PHYSICAL PROPERTIES:

Material	Woven Kevlar (Aramid) fibre
Weight (±10%)	447g/m² / 13.2oz/yd²
Max. Operating Temp	260°C / 500°F (surge to 300°C / 572°F) (NB: Limited to max. operating temperature of connector underneath)

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	FOOD SAFETY	FOOD SAFETY	ATEX

* Does not come in contact with product therefore can be used in conjunction with a 3A certified inner connector
Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	80273	310	80274	315	80049	319	80130	330	80137	343	80136	352	80135	356	80131	372	80327	394	80141	415	80345	437	80133	458	80134	482
100	80044	310	80123	315	80089	319	80022	330	80068	343	80030	352	80031	356	80098	372	80099	394	80041	415	80055	437	80122	458	80077	482
150	80026	318	80124	325	80025	331	80034	355	80086	368	80023	383	80011	398	80043	413	80085	441	80058	468	80162	495	80016	516	80079	544
200	80045	328	80109	336	80050	343	80002	355	80027	368	80003	383	80057	398	80029	413	80061	441	80004	468	80013	495	80028	516	80095	544
250	80145	338	80275	348	80108	355	80071	368	80090	386	80129	404	80180	421	80069	439	80174	467	80054	497	80175	526	80173	550	80176	580
300	80046	349	80246	360	80019	366	80018	381	80020	404	80021	424	80172	444	80103	464	80212	494	80116	526	80117	556	80118	583	80114	617
350	80263	358	80276	372	80210	378	80119	394	80226	421	80190	444	80177	466	80104	489	80239	521	80217	554	80346	586	80249	617	80231	653
400	80047	368	80277	383	80248	389	80084	407	80216	439	80150	464	80036	489	80017	514	80037	548	80009	582	80347	617	80359	650	80369	690
450	80264	379	80278	395	80289	401	80297	419	80148	455	80107	484	80208	512	80235	540	80328	576	80163	610	80348	647	80144	683	80214	727
500	80048	389	80279	407	80051	412	80052	433	80053	474	80311	504	80065	534	80066	565	80067	603	80243	639	80349	677	80170	717	80370	763
550	80265	399	80280	419	80186	424	80298	445	80300	491	80386	524	80230	557	80183	590	80329	630	80337	667	80350	707	80360	751	80371	799
600	80222	409	80281	431	80236	436	80229	458	80038	508	80205	544	80178	580	80070	616	80330	656	80338	696	80351	738	80361	784	80372	836
650	80266	419	80282	442	80290	448	80299	472	80302	526	80312	565	80211	604	80322	640	80331	683	80339	725	80352	768	80362	817	80223	872
700	80267	429	80283	454	80291	458	80221	484	80305	544	80313	584	80191	626	80152	665	80153	710	80340	752	80353	797	80363	851	80373	909
750	80268	439	80284	466	80292	470	80301	498	80306	562	80014	605	80097	649	80101	691	80332	737	80096	781	80354	829	80364	884	80374	946
800	80269	449	80285	478	80293	481	80181	511	80106	579	80314	625	80318	671	80323	716	80333	764	80341	809	80355	859	80365	917	80375	982
850	80270	459	80286	490	80294	493	80234	524	80307	596	80315	645	80319	694	80324	742	80334	791	80342	837	80356	889	80366	952	80376	1019
900	80271	470	80287	502	80295	505	80303	536	80308	614	80316	665	80320	717	80325	767	80335	818	80343	866	80357	919	80367	984	80377	1056
950	80272	479	80288	513	80296	517	80304	550	80309	632	80317	685	80321	740	80326	792	80336	845	80344	895	80358	949	80368	1018	80378	1093
1000	80252	490	80032	525	80253	529	80254	562	80128	649	80255	705	80256	763	80257	817	80258	871	80259	925	80260	980	80261	1052	80262	1129

The prices shown above indicate our Recommended Retail Prices (RRP).

Black-out Cover

Designed for light sensitive applications, fits over our entire connector range.



- The cover cuts out all light and is for use in light sensitive areas
- Designed to fit over existing BFM® connectors.
- Easy to install and no tools are required.

PHYSICAL PROPERTIES:

Material	Polypropylene (wire used for the holders is 6mm 304 stainless steel)
Weight (±10%)	207 g/m² / 6.1 oz/yd²
Max. Operating Temp	95°C / 203°F

Maximum Diameter:	1,650mm
Maximum Length:	1,000mm
Available with SS Rings?	No
Available with Plastic Rings?	No

VIBRATION	OSCILLATION	COMPRESSION	DUST TIGHT	FOOD SAFETY	ATEX

* Does not come in contact with product therefore can be used in conjunction with a 3A certified inner connector

Additional sizes are available up to 1,650mm diameter.

DIA:	Ø100mm		Ø125mm		Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm		Ø500mm		Ø550mm		Ø600mm		Ø650mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	60057	280	60214	286	60188	290	60184	300	60032	311	60034	319	60037	323	60311	338	60325	356	60189	376	60352	396	60078	416	60381	437
100	60108	280	60234	286	80245	290	60058	300	60033	311	60035	319	60038	323	60039	338	60061	356	60044	376	60074	396	60076	416	60060	437
150	60097	289	60235	294	60046	301	60056	322	60066	334	60036	348	60086	361	60040	375	60201	400	60065	425	60055	449	60219	467	60215	493
200	60220	298	60236	305	60182	311	60030	322	60031	334	60042	348	60048	361	60049	375	60102	400	60045	425	60202	449	60043	467	60187	493
250	60221	307	60237	316	60104	322	60105	334	60073	350	60068	366	60081	382	60064	398	60218	424	60067	451	60353	477	60367	499	60382	526
300	60080	316	60238	326	60178	332	60216	345	60089	366	60287	385	60213	402	60312	421	60099	449	60339	477	60354	504	60368	529	60383	559
350	60222	325	60239	338	60179	343	60262	357	60274	382	60209	402	60300	423	60106	444	60103	473	60340	503	60355	532	60075	559	60384	593
400	60223	334	60240	348	60180	353	60053	369	60275	398	60288	421	60072	444	60088	466	60326	497	60341	529	60356	559	60369	590	60385	626
450	60224	343	60241	358	60253	363	60263	380	60276	413	60289	439	60217	464	60313	490	60327	521	60342	554	60357	587	60370	620	60386	659
500	60183	353	60242	369	60490	374	60264	392	60098	429	60290	457	60181	485	60314	512	60328	545	60343	580	60191	614	60371	650	60493	692
550	60054	362	60243	380	60491	385	60265	404	60277	445	60291	476	60301	505	60315	535	60329	570	60344	606	60358	642	60372	680	60387	725
600	60225	371	60244	391	60254	395	60266	416	60278	461	60292	493	60302	527	60316	558	60330	595	60194	632	60192	669	60205	711	60193	758
650	60226	380	60245	401	60255	406	60267	427	60279	477	60293	512	60303	547	60317	581	60331	619	60345	658	60359	697	60373	741	60388	791
700	60227	389	60246	412	60256	416	60063	439	60280	493	60294	530	60304	568	60318	604	60332	643	60346	683	60360	724	60374	771	60389	824
750	60228	398	60247	423	60257	427	60268	451	60281	509	60295	548	60305	588	60319	626	60333	668	60203	710	60361	752	60375	802	60204	858
800	60229	407	60248	433	60258	437	60269	463	60282	526	60296	567	60306	609	60320	650	60334	692	60347	735	60362	779	60376	832	60391	891
850	60230	417	60249	444	60259	448	60270	475	60283	541	60297	584	60307	630	60321	673	60335	717	60348	761	60363	806	60377	862	60392	924
900	60231	426	60250	454	60260	458	60271	487	60284	557	60210	604	60308	650	60322	695	60336	741	60349	786	60364	833	60378	893	60393	957
950	60232	436	60251	465	60185	468	60272	499	60285	572	60298	621	60309	671	60323	718	60337	766	60350	813	60365	860	60379	923	60394	991
1000	60233	444	60252	476	60261	479	60273	509	60286	589	60299	640	60310	692	60324	741	60338	791	60351	841	60366	889	60380	954	60395	1023

The prices shown above indicate our Recommended Retail Prices (RRP).

Bulk Bag Loader

A three-layered, inflatable filling head featuring a stainless steel core fully encased in Seeflex ether-based urethane.



- Includes external air fitting that plugs into an 8mm pneumatic air line to inflate super strong & flexible outer layer.
- Top of loader simply snaps into a BFM[®] fitting spigot and features a fully encapsulated stainless steel ring to support lower end.
- All Bulk Bag Loaders are a standard length of 330mm.
- Built-in pressure relief valve to prevent over-inflation

PHYSICAL PROPERTIES:

Material	Seeflex -Ether-based thermoplastic polyurethane with stainless steel core
Wall Thickness (±10%)	0.9mm / 1/32 inch (Seeflex Section)
Operating Temp Range	-25 to 110°C / -13 to 230°F (surge to 120°C to 248°F)
Surface Resistivity(Ohms)	10 ¹⁰

Maximum Diameter: 450mm
Available with SS Rings? No
Available with Plastic Rings? No



DUST TIGHT



FOOD SAFETY



ATEX

#All BFM[®] fitting connectors comply with 3-A 60-64 Sanitary Fittings
* Material only

DIA:	Ø150mm		Ø200mm		Ø250mm		Ø300mm		Ø350mm		Ø400mm		Ø450mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
330mm*	305078	946	305075	982	304794	1019	304793	1055	304791	1092	302363	1128	304828	1201



The prices shown above indicate our Recommended Retail Prices (RRP).

Weighing Bellows



- Made from strong, durable, transparent Seeflex 040E urethane alloy (3A & EU Compliant)
- Patented design provides minimal resistance to absorb vibrations/movement without affecting weighing equipment below
- Asymmetrical conical shape eliminates the possibility of product build-up inside connector, affecting weighing
- BFM® snap-fit blue-band cuff and spigot system means fast, easy installation, cleaning and replacement

DIA:	Ø100mm		Ø150mm		Ø200mm	
LENGTH: (mm)	Part No:	RRP US\$:	Part No:	RRP US\$:	Part No:	RRP US\$:
80	305216	232	305218	298	305219	364

The prices shown above indicate our Recommended Retail Prices (RRP).

The following products are also available, but due to the variables involved, are quoted on request:

Venting Surge Hopper



- Tapered and angled connector with built-in partition
- Ideal for use as an intermediary hopper above a rotary valve to prevent bridging of product and encourage flow
- Partition allows powder to flow in on one side of the partition and displaced air to flow up and out the other
- Gives visibility of product flow without having to open an inspection hatch
- Easy to remove for cleaning in between product runs

Tapers



- Used as intermediary hoppers to give visibility and control over product flow/feed into process.
- Can be used to transition a larger pipe into a smaller diameter pipe to reduce flow rate or control flow rate properties or simply where two identical diameter inlet/outlets aren't possible.
- Used to reduce product contact with the walls of connector when smaller diameter is positioned at the top and larger diameter at the bottom (ideal for abrasive products/high velocity flow).

Corner Connector



Corner Connector 040E

- CIP (clean-in-place) wash processes to replace traditional steel tun-dish and swiveling pipework.
- Designed for applications where product/material needs to be transported around a bend.
- Custom diameter and length combinations available (Subject to limitations)



Corner Connector 060ES

- CIP (Clean-In-Place) wash processes to replace traditional steel tun-dish and swiveling pipework.
- Made from pressure-resistant Seeflex 060ES so ideal for high head-pressure CIP applications.
- Custom diameter and length combinations available (Subject to limitations)